

Swivel-D Anchor

One of our most versatile anchors features a 360° rotation and 180° flip. Bolt attach, field weld or concrete embedment for permanent or temporary installation.



Swivel-D Specifications

- Min. tensile strength 5,000lb
- Stainless steel shackle
- 5/8" attachment bolt
- SAS factory tensile test report available on request

User Specifications

- Single person PPE
- HLL end anchors
- Window washing

Compliance

ANSI Z359.18-17 Type A/T
CSA Z259.15:22 Type A/T
Window Washing ANSI/IWCA I-14.1

No. 1028 Swivel-D™ Package Contents

- 1ea No. 1028 Swivel-D anchor
- 5/8" x 2" sst bolt w/lock nut



No. 1028-DP6 Package Contents

- 1ea No. 1028 Swivel-D anchor
- 6" x 6" x 3/8" Hot dip galvanized (HDG) base plate
- 5/8" x 1-1/4" sst bolt



No. 1028-DB6 Package Contents

- 6" x 6" x 3/8" Hot dip galvanized (HDG) base plate w/5/8" threaded top
- 1" thread depth




Compatible Attachments



No. 1303-G Package Contents

- 1ea No. 1028 Swivel-D anchor
- 6" x 6" x 3/8" Hot dip galvanized (HDG) base plate
- 5/8" x 1-1/2" threaded stud w/lock nut

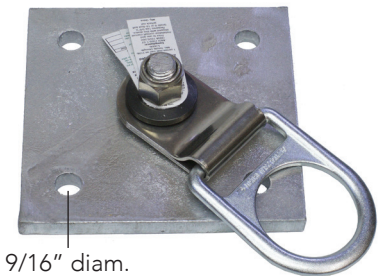

Request Unit Pricing

Part No.	Part Name	Description	wt/lb
▲ 1028	Swivel-D	Anchor only	1
▲ 1028-DP6	Swivel-D	Anchor w/base plate	6.5
▲ 1028-DB6	Base Plate	5/8" threaded top	5.5
▲ 1303-G	Base Plate	5/8" x 1-1/2" threaded stud	4
▲ 1303-GB	Swivel-D	Anchor w/threaded stud	5

▲ Stock Part. Note 1: Max. proof load 2,500lb.
Note 2: Backer plates may be required for installation.
Note 3: All attachment bolts/studs 5/8"-11.

No. 1303-GB Package Contents

- 6" x 6" x 3/8" Hot dip galvanized (HDG) base plate
- 5/8" x 1-1/2" threaded stud w/lock nut

