

# Wood Purlin Anchor



Designed for installation onto double 2x4 wood purlins commonly used in pole buildings. Use for temporary or permanent fall protection.

## Specification

- Min. tensile strength 5,000lb
- No.1302-2XM 3/16" hot dip galvanized (HDG)
- Installs w/8 WS screws
- Single person PPE anchor HLL system
- Permanent/temporary use for fall arrest/fall restraint

## Compliance

ANSI Z359.1-07  
OSHA 1926.502

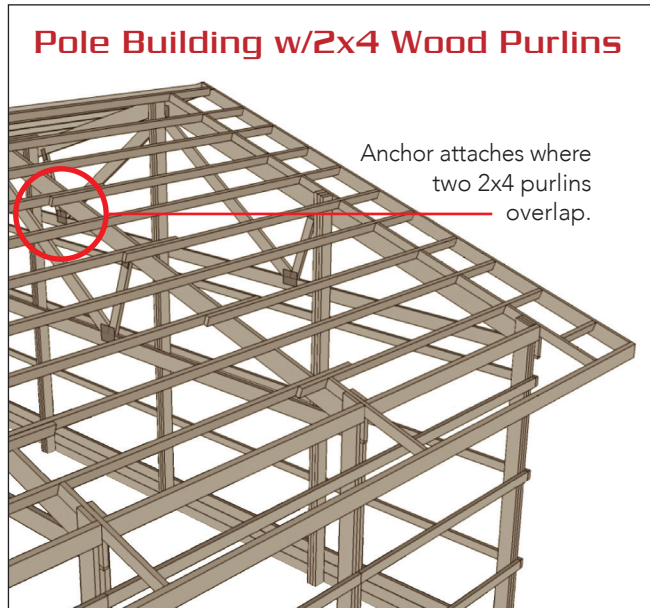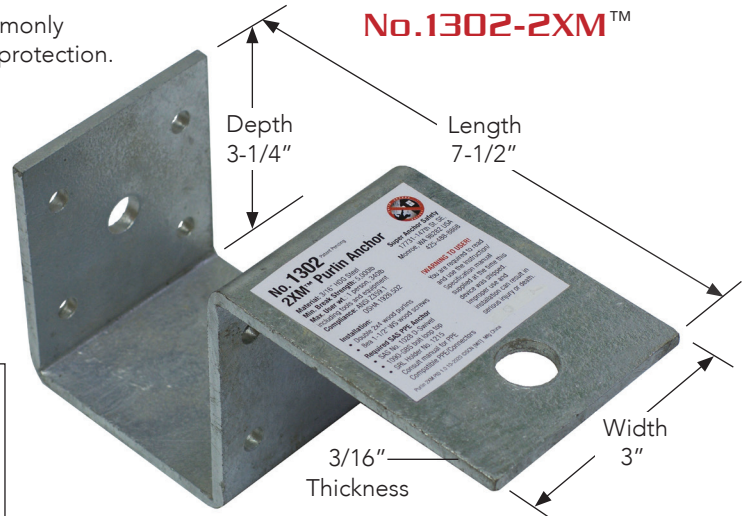

## Installation

Attaches to double 2x4 purlins with 8ea 1-1/2" WS wood screws



## Installation Options

### Temporary




**No.1302-PS**  
Kit

### Permanent



**No.1302-PSK**  
Kit

### Fits Most SRL's Rotates 360°

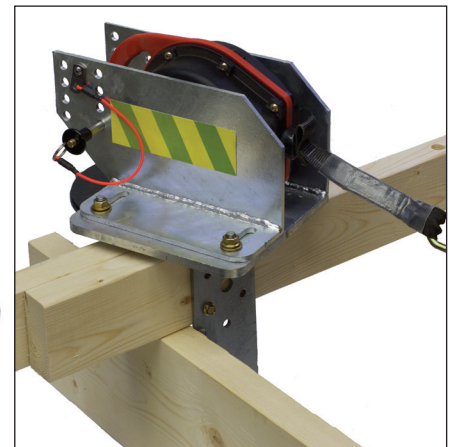

**No.1215-UH**  
SRL Holder Complete Kit