


Standing Seam Anchor

Standing Seam Anchor No.1207 is available in 3 lightweight aluminum base plate sizes to fit panel seam widths of 8-1/2" up to 26-1/2" wide. 3rd party tested to withstand a 5,000lb force in the specified load direction. Use with SAS No.1208 seam clamp or No.8511 RCT seam clamps for a wide range of standing seam profiles.

No.1207 Standing Seam Anchor

Permanent or Temporary Use

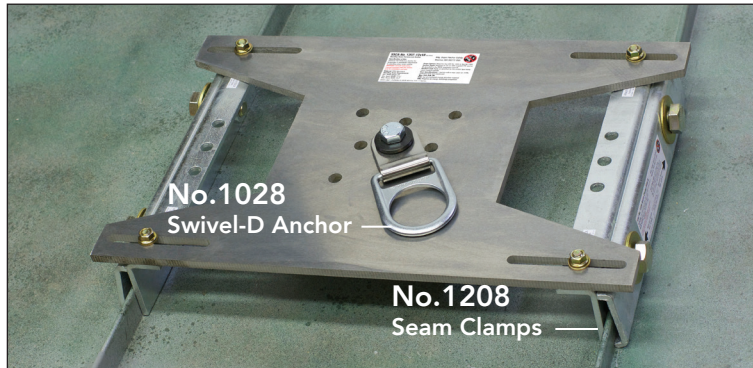

No.1207 Specifications

- Min. tensile strength 5,000lb*
- 3/8" grd. 5052 aluminum w/stamped date of mfg.
- Fits a wide range of metal panel profiles

*Request Intertek Standing Seam Report

User Specifications


Single person 310lb
HLL 2 person fall arrest
HLL 3 person fall restraint

Compliance


ANSI Z359.1-07/OSHA 1926.502

No.1208 Seam Clamps

- Snap-Lock seams
- On-site formed seams
- Min. seam height 3/4"

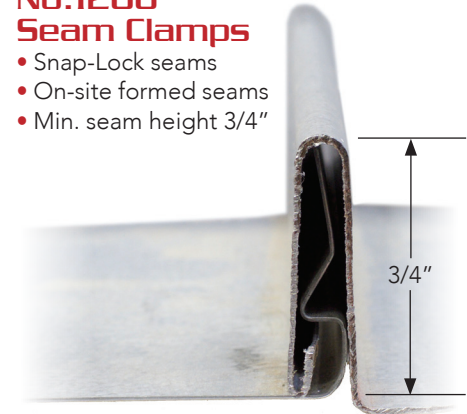

No.1208 Standing Seam Clamp

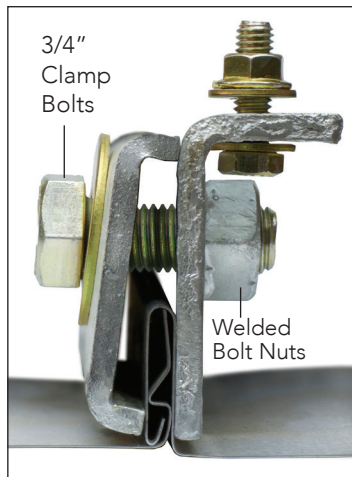

Do not use with low profile snap-lock seams



Request Unit Pricing

Part No.	Fits Panel/Inches	Seam Clamp	PPE Anchor	wt/lb
▲ 1207C-12x18	12-18	2pc No.1208*	No.1028* Swivel-D	23
▲ 1207C-14x22	14-22			24
▲ 1207C-18x24	18-24			26

▲ Stock Part. *Includes 5/8"x2-1/4" or 2-3/4" Swivel-D attachment bolt.

Panel Width Adjustment

