




# Standing Seam Anchor VLL Rigging Examples

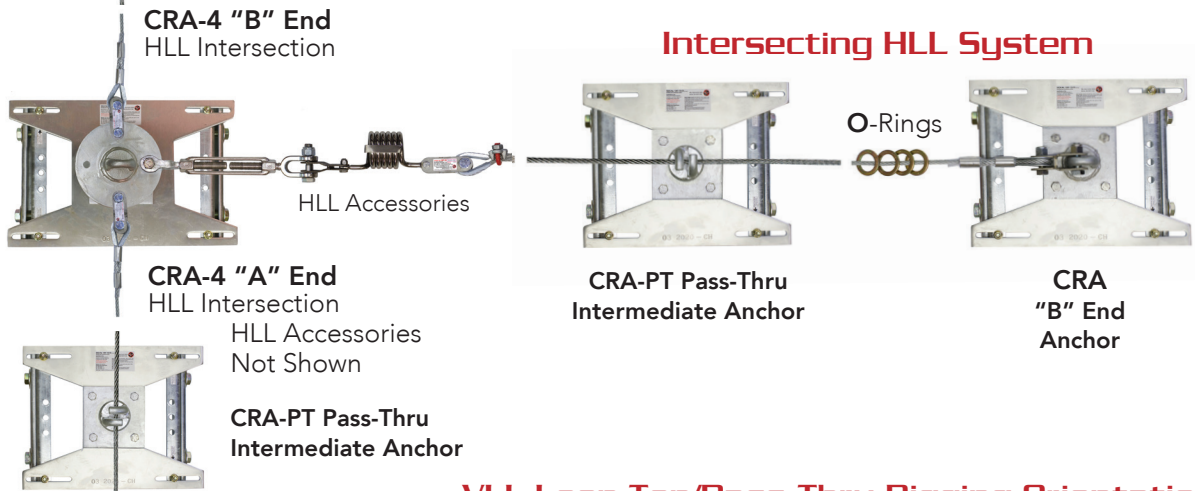

Standing seam anchors used for VLL's and HLL's are position oriented by rotating bolt attached base plates 90°. CRA-4 4-Way anchors are used to intersect a HLL at the ridge, eave, or any point along the VLL as shown in the example here. **Riser Height:** Standing seam bolt attached anchors have a 5" max. riser height to minimize stress applied to the panel seams.

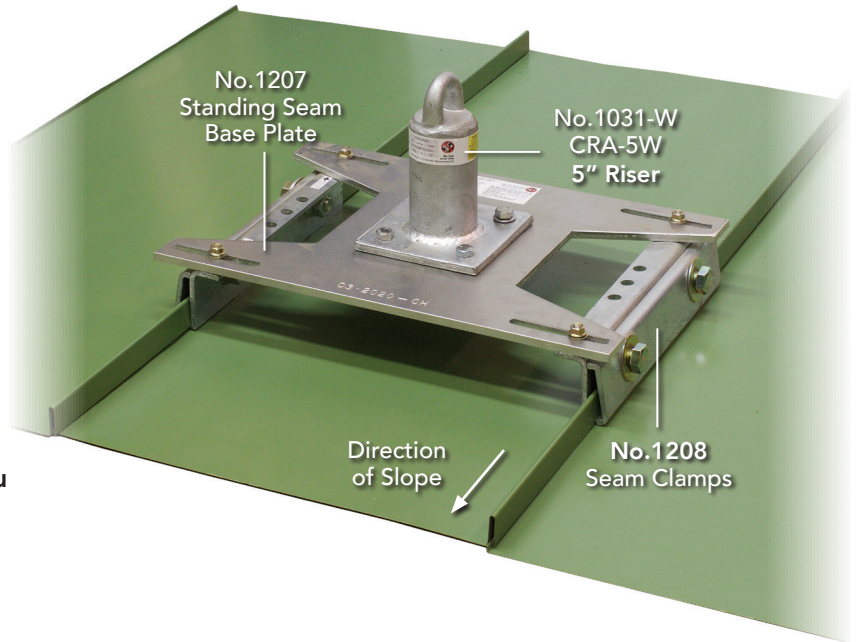

## VLL Loop Top/Pass-Thru Rigging Orientation

