

Sub-Surface Anchor for Concrete Decks

The SSA 1305-A fall protection anchor is specified for poured in place concrete decks and other suitable applications. The threaded loop top is removable allowing for permanent or temporary use and features a chrome steel cover plate to conceal the adjuster bolt when not in use. Specified for exterior or interior installations.

Specifications

- Min. tensile strength 5,000lb
- Fall arrest or fall restraint
- Adjustable receiver bolt for varying substrate and slab thicknesses
- Primer coated steel

Compliance

ANSI Z359.18-17 Type A/T
CSA Z259.15:22 Type A/T
OSHA 1926.502


Ordering Information

Part No.	Description	wt/lb
▲ SSA 1305-A	See pkg. Contents	9
■ 1309-X	Receiver Bolt	


▲ Stock Part ■ Custom mfg. specify slab depth.
Note: 2" attachment bolts for a max. substrate thickness of 1". Order longer attachment bolts if required.

SSA No.1305-A



US Pat. No.11,724,135

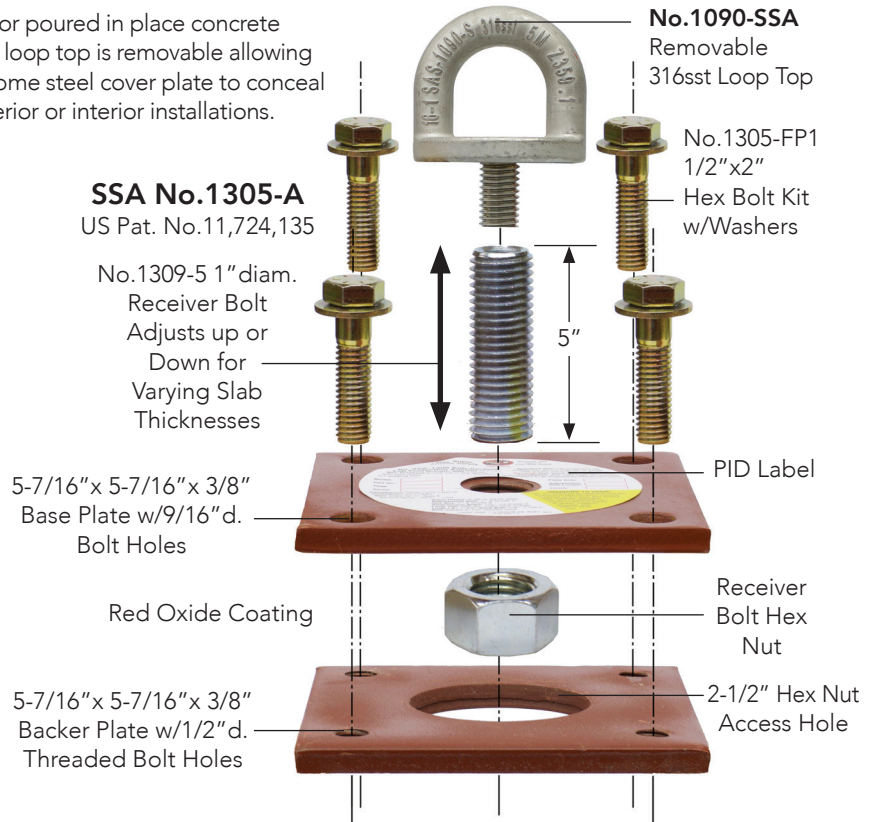

Installation over Wood Deck

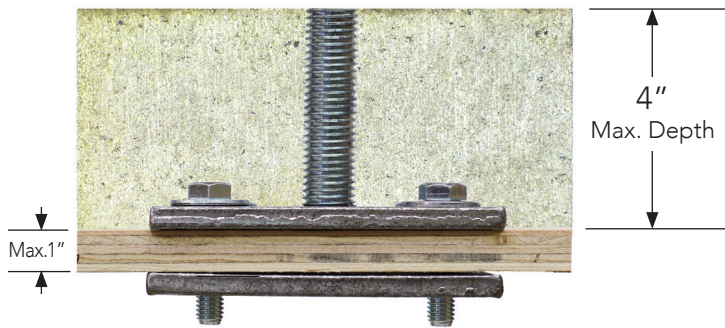

Installation over Type B Metal Deck

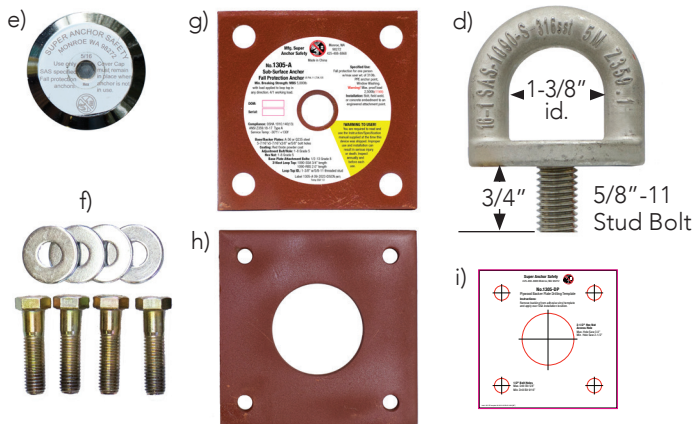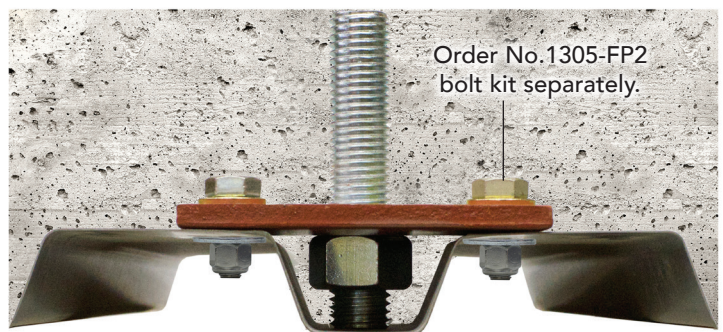

SSA 1305-A pkg. Contents

- 1ea 5/8"x1" temporary bolt
- 1ea No.1309-5 1"x5" receiver bolt
- 1ea 1" receiver bolt hex nut
- 1ea No.1090-SSA loop top
- 1ea No.1305-RC chrome plated steel cover plate
- 1ea No.1305-FP1 bolt kit
4ea 1/2"x2" grd. 8 bolts + washers
- 1ea No.1307-A base plate
- 1ea No.1308 backer plate
- 1ea No.1305-DP wood deck adhesive back bolt hole template.