


Parapet Wall Anchor

A SAS design with 12 adjustment positions for varying wall thickness. The guardrail stanchion socket provides a strong compression locking system with two 5/8" bolt nuts welded in place for easy attachment.

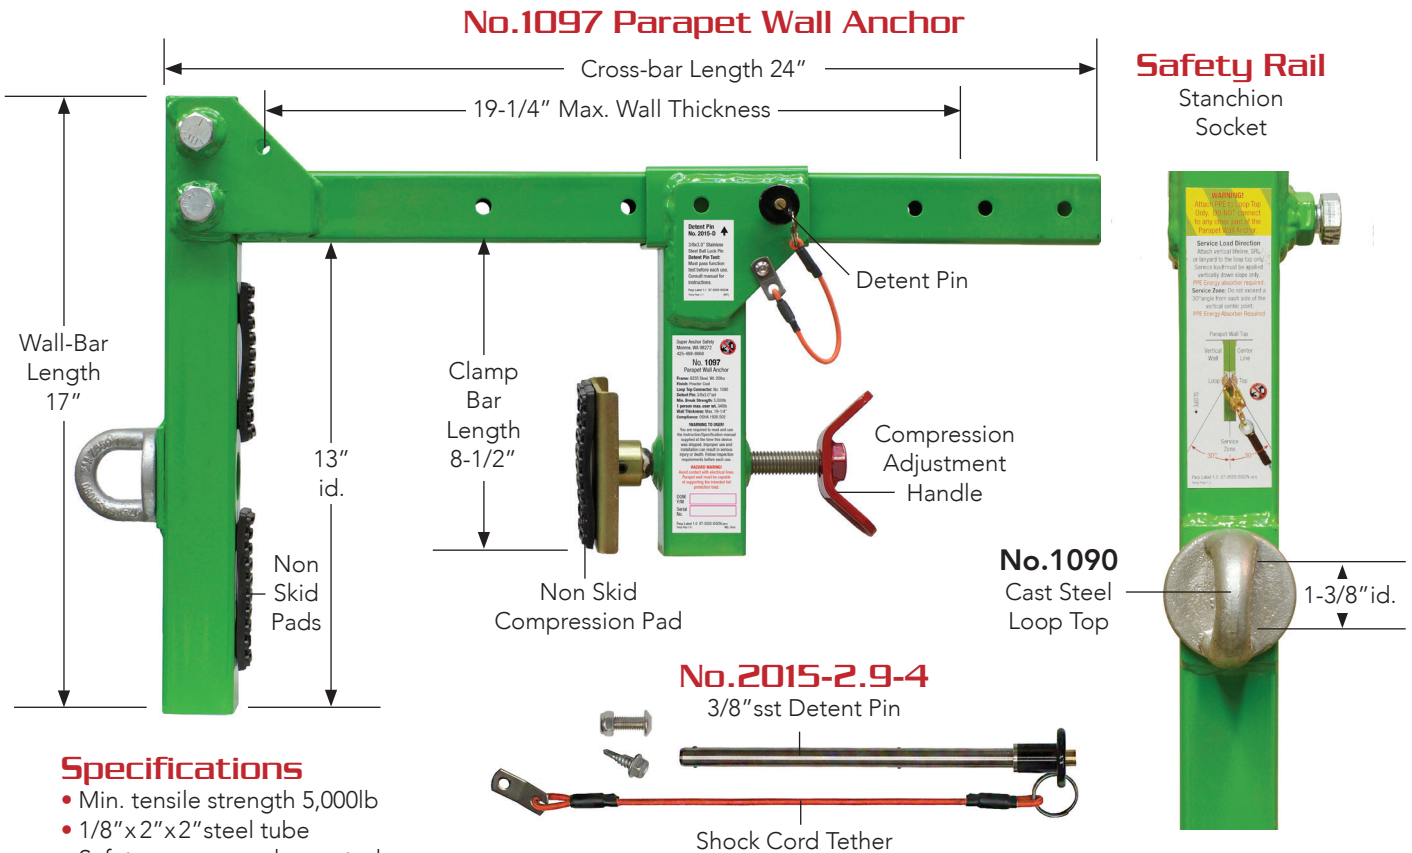

Specifications

- Min. tensile strength 5,000lb
- 1/8"x2"x2" steel tube
- Safety green powder coated
- 12 adjustment positions 3/4" up to 19-1/4"
- No.2015-2.9-4 3/8" sst detent pin w/shock cord tether
- 1-3/4"x1-3/4" id. guardrail stanchion socket
- 2ea 5/8"x1-3/4" grd. 5 stanchion bolts

Compliance

ANSI Z359.1-07/OSHA 1926.502

User Specification

Single person PPE fall arrest/fall restraint
 Not rated for HLL

Request Unit Pricing

Part No.	Description	wt/lb
▲ 1097	Parapet Wall Anchor	23
▲ 2015-2.9-4	Replacement Detent Pin w/Tether	1
▲ □ 1028-P	Swivel-D w/3/8" attachment bolt+bushing	1

▲ Stock Part. □ Optional part not included.

