

CTT Threaded Top Anchors

3.0"od. CTT Anchors

Specified for bolt attached PPE components and HVAC equipment supports. Fitted with a 1" thick riser cap with a water stopper plate that prevents moisture from entering through the attachment bolt hole. The threaded cap is ideal for attaching equipment intended for temporary use. Same design and materials as CRA model anchors.

Specifications

- Min. tensile strength 5,000lb
- 5/8"-11x1" threaded riser cap
Q235 steel or 304sst **
- Hot dip galvanized (HDG), 304sst or 316sst
- No.2022 40pc 2-1/2" hex head screws for 52 hole base plate models w/max. riser ht.18"
- 3rd party engineering by DH Glabe & Assoc.
Report available on request
- Contact SAS sales team for custom mfg. and lead times


Compliance

ANSI Z359.18-17 Type A/T*
CSA Z259.15:22 Type A/T*
Window Washing: ANSI/IWCA I-14.1
OSHA 1926.502
*Request Intertek CRA Lab Report

Request Unit Pricing


Riser Height	Part Name	Part No.	Material Type	Base Plate Inches	Anchor wt/lb	Riser ▲Sch
8	△ □ CTT-8	1480-G	■ HDG	16x16x3/8 52 Hole	35	40 0.203 3.0"od.
		1480-S	■ 304sst			
12	△ □ CTT-12	1481-G	■ HDG			
		1481-S	■ 304sst			
18	△ □ CTT-18	1482-G	■ HDG		40	
		1482-S	■ 304sst			
24	△ CTT-24	1483-G	■ HDG	16x16x5/8 16 Hole	66	80 0.276 3.0"od.
		1483-S	■ 304sst	12x12x5/8 8 Hole	42	
30	△ CTT-30	1484-G	■ HDG	12x12x3/4 8 Hole	55	
		1484-S	■ 304sst			
36	△ CTT-36	1485-G	■ HDG			
		1485-S	■ 304sst			

- Standard Design Custom mfg. ▲ Nominal Dimension.
- May be attached with SAS specified screws.
- △ Bolt, concrete embedment, expansion bolts or field welded.
- **Non-accessory attachment bolt to be supplied by contractor.
- Note 1: Max. proof load 2,500lb.
- Note 2: Backer plates may be required for installation.

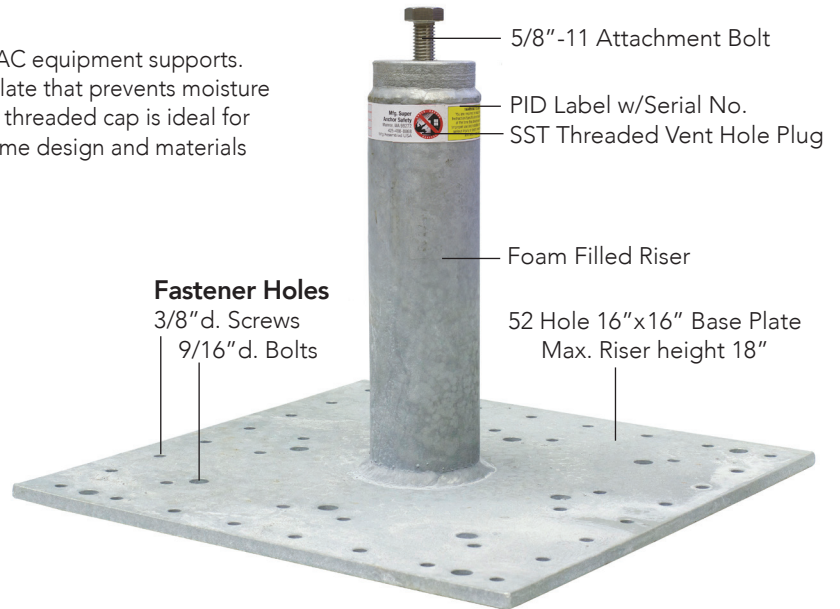

Attachment Bolt

Required to use 5/8"-11
grd. 5 or 18-8sst
attachment bolt.

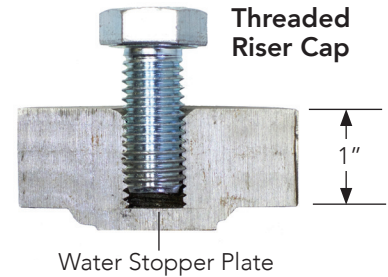

Compatible Accessories
Supplied w/Attachment Bolt

