

RTT Threaded Top Field Weld Risers

3.0"od. RTT Field Weld Risers

Field weld anchors are compatible with the same bolt attached equipment as our CTT models.

Specifications

- Min. tensile strength 5,000lb
- 5/8"-11x1" threaded riser cap
Q235 steel or 304sst **
- Hot dip galvanized (HDG), 304sst or 316sst
- 3rd party engineering by DH Glabe & Assoc.
Report available on request
- Contact SAS sales team for custom mfg. and lead times

Compliance

ANSI Z359.18-17 Type A/T*
CSA Z259.15:22 Type A/T*
Window Washing: ANSI/IWCA I-14.1
OSHA 1926.502
*Request Intertek CRA Lab Report

5/8"-11 Attachment Bolt

PID Label w/Serial No.

SST Threaded Vent Hole Plug

Field Weld to Structural Steel



Request Unit Pricing

| Riser Height | Part Name | Part No. | Material Type | Anchor wt/lb | Riser ▲ Sch |
|--------------|-----------|----------|---------------|--------------|------------------------|
| 8 | RTT-8 | 1450-G | ■ HDG | 6 | 40 0.203 3.0"od. |
| | | 1450-S | ■ 304sst | | |
| 12 | RTT-12 | 1451-G | ■ HDG | 8 | |
| | | 1451-S | ■ 304sst | | |
| 18 | RTT-18 | 1452-G | ■ HDG | 12 | |
| | | 1452-S | ■ 304sst | | |
| 24 | RTT-24 | 1453-G | ■ HDG | 16 | 80 0.276 3.0"od. |
| | | 1453-S | ■ 304sst | | |
| 30 | RTT-30 | 1454-G | ■ HDG | 20 | |
| | | 1454-S | ■ 304sst | | |
| 36 | RTT-36 | 1455-G | ■ HDG | 26 | |
| | | 1455-S | ■ 304sst | | |

■ Standard Design Custom mfg. ▲ Nominal Dimension.

**Non-accessory attachment bolts to be supplied by contractor.


Note 1: Max. proof load 2,500lb.

Note 2: If required, foam filling to be provided by contractor after welding.

Note 3: PID label supplied loose for application after welding.

Attachment Bolt

Required to use 5/8"-11
grd. 5 or 18-8sst
attachment bolt.

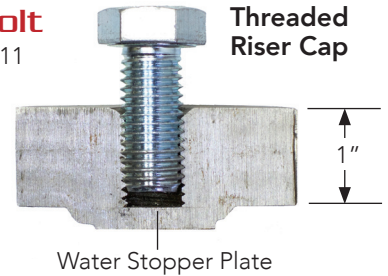

Sloped HDG/304sst Risers

RTT-SL
No.1450-X

CTT-SL
No.1480-X



Contact
Sales Team
for Custom
mfg. and
lead times.