

CRO-TR Threaded Top Anchors

4.5"od. CRO-TR Anchors

Specified for bolt attached PPE components and HVAC equipment supports. Fitted with a 1" thick riser cap with a water stopper plate that prevents moisture from entering through the attachment bolt hole. The threaded cap is ideal for attaching equipment intended for temporary use. Mfg. in the USA.

Specifications

- Min. tensile strength 5,000lb
- 5/8"-11x1" threaded riser cap
Q235 steel or 304sst.**
- Hot dip galvanized (HDG), 304sst or 316sst
- 3rd Party engineering by DH Glabe & Assoc.
Report available on request
- Contact SAS sales team for custom mfg. and lead times

Compliance

ANSI Z359.18-17 Type A/T*
CSA Z259.15:22 Type A/T*
Window Washing: ANSI/IWCA I-14.1
OSHA 1926.502
**Request Intertek CRO Lab Reports*


Compatible Accessories

Supplied w/Attachment Bolt

- **No.1028** Swivel-D
- **No.1090-SSA** Loop Top
- **No.1215 SRL-UH** SRL Holder


Attachment Bolt

Required to use 5/8"-11
grd. 5 or 18-8sst
attachment bolt.

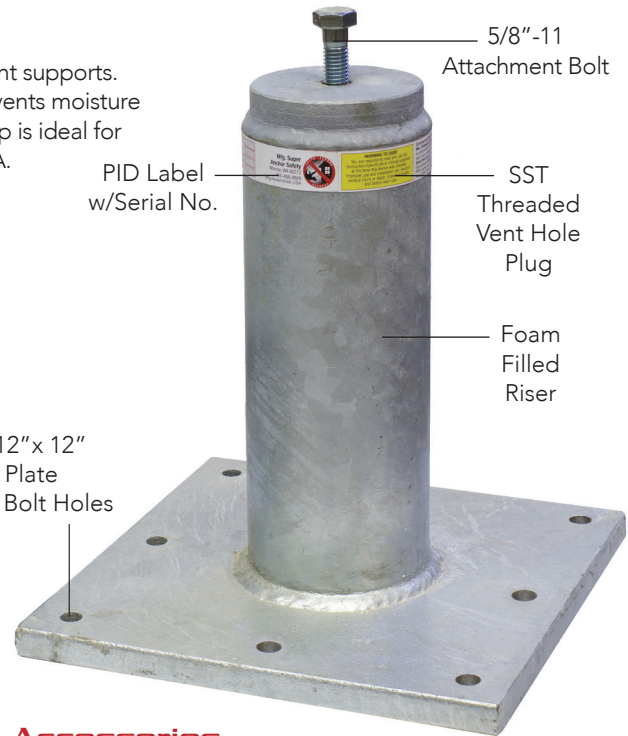


Request Unit Pricing

Riser Height	Part Name	Part No.	Material Type	Base Plate Inches	Anchor wt/lb	Riser Sch ▲ Sch
8	△ CRO-TR8	1486-G	■ HDG	12x12x5/8 8 Bolt Hole	43	80 0.337 4.5"od.
		1486-S	■ 304sst			
12	△ CRO-TR12	1487-G	■ HDG	12x12x3/4 8 Bolt Hole	49	
		1487-S	■ 304sst			
18	△ CRO-TR18	1488-G	■ HDG		64	
		1488-S	■ 304sst			
24	△ CRO-TR24	1489-G	■ HDG		73	
		1489-S	■ 304sst			
30	△ CRO-TR30	1490-G	■ HDG		81	
		1490-S	■ 304sst			
36	△ CRO-TR36	1491-G	■ HDG		90	
		1491-S	■ 304sst			

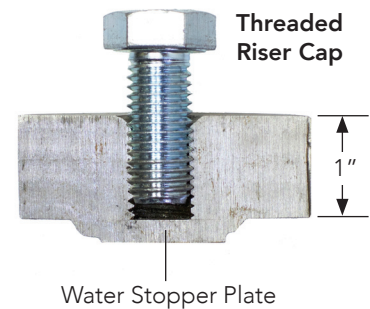

Compatible Accessory

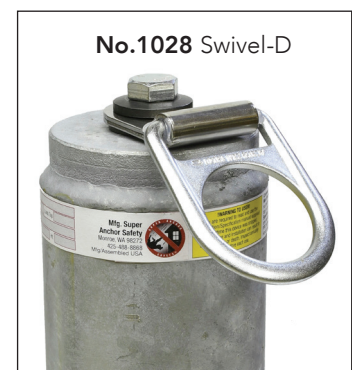

■ Standard Design Custom mfg. ▲ Nominal Dimension.
△ Bolt, concrete embedment, expansion bolts or field welded.
**Non-accessory attachment bolt to be supplied by contractor.
Note 1: Max. proof load 2,500lb.
Note 2: Backer plates may be required for installation.