

CRR-TR Threaded Top Field Weld Risers

4.5"od. CRR-TR Field Weld Risers

Field weld risers are compatible with the same attached equipment as our CRR models.

Specifications

- Min. tensile strength 5,000lb
- 5/8"-11x1" threaded riser cap Q235 steel or 304sst **
- SST threaded vent hole plug
- Hot dip galvanized (HDG), 304sst or 316sst
- 3rd party engineering by DH Glabe & Assoc
Report available on request
- Contact SAS sales team for custom mfg. and lead times

Compliance

ANSI Z359.18-17 Type A/T*
 CSA Z259.15:22 Type A/T*
 Window Washing: ANSI/IWCA I-14.1
 OSHA 1926.502
 *Request Intertek CRO Lab Report

PID Label
w/Serial No.




5/8"-11
Attachment Bolt

SST
Threaded
Vent Hole
Plug

Attachment Bolt

Required to use 5/8"-11
 grd. 5 or 18-8sst
 attachment bolt.

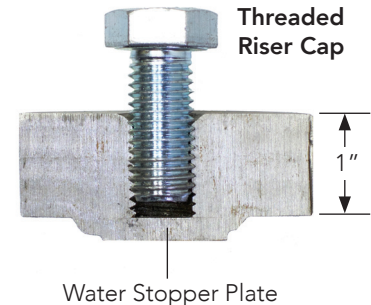

Threaded
Riser Cap

Water Stopper Plate

Request Unit Pricing

Riser Height	Part Name	Part No.	Material Type	Anchor wt/lb	Riser ▲Sch
8	CRR-TR8	1492-G	■ HDG	19	80 0.337 4.5"od.
		1492-S	■ 304sst		
12	CRR-TR12	1493-G	■ HDG	21	
		1493-S	■ 304sst		
18	CRR-TR18	1494-G	■ HDG	30	
		1494-S	■ 304sst		
24	CRR-TR24	1495-G	■ HDG	37	
		1495-S	■ 304sst		
30	CRR-TR30	1496-G	■ HDG	46	
		1496-S	■ 304sst		
36	CRR-TR36	1497-G	■ HDG	55	
		1497-S	■ 304sst		

■ Standard Design Custom mfg. ▲ Nominal Dimension.


**Non-accessory attachment bolts to be supplied by contractor.

Note 1: Max. proof load 2,500lb.

Note 2: If required, foam filling to be provided by contractor after welding.

Note 3: PID label supplied for installation after field welding.

Compatible Accessories Supplied w/Attachment Bolt

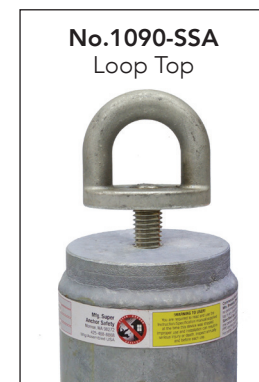

No.1090-SSA
Loop Top



No.1215-UH
SRL Holder