


4.5"od. Sloped Anchors

The most common variations of standard SAS designs with larger diameter risers are shown here. Project specific designs are also available. Contact SAS sales team for custom mfg. and lead times.

Top Fixture Orientation

A= Parallel with the ridge. **B**= Perpendicular/90° to the ridge.

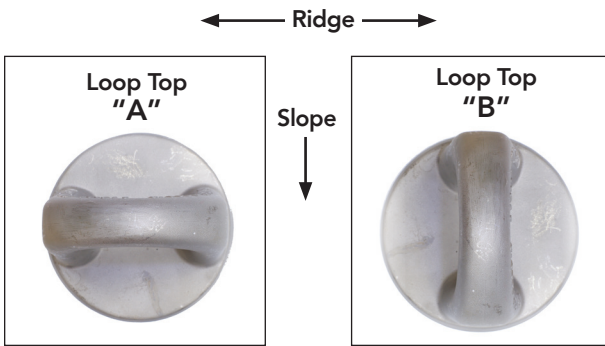

Custom Specifications

- Material type and finish
- Riser height
- Base plate dimensions
- Bolt hole sizes and locations
- Top fixture type and orientation
- Degree of slope and angle
- 3rd party engineering available



Anchors with Base Plates

Part No.	Part Name	Top Fixture Orientation	Riser	
			Type	Slope
1400-X	CROS-A	"A"	Loop	Specify Degree of Angle or Pitch
	CROS-B	"B"		



Field Weld Risers

Part No.	Part Name	Top Fixture Orientation	Riser	
			Type	Slope
1201-X	CRRS-A	"A"	Loop	Specify Degree of Angle or Pitch
	CRRS-B	"B"		



Threaded Top Anchors

Part No.	Part Name	Top Fixture	Riser Slope
1486-X	CROS-TR	TRC-4.5	Specify Degree of Angle or Pitch
1492-X	CRRS-TR		

