ARS 2x4 Anchor Kit

All ARS anchors shown here are supplied with a fastener pack that includes a stainless steel wing nut for tool free installation as well as an optional nylock nut.
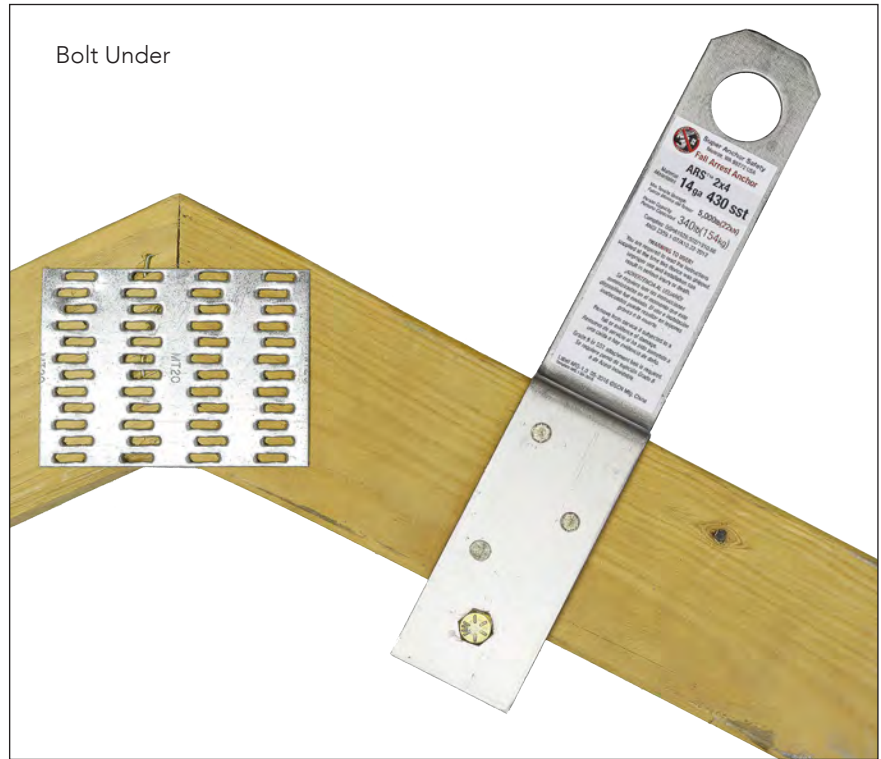
Specification of Use:
Fall Arrest 1 person max. wt. 340lb
Compliance:
OSHA 1926:502, 1910.66
ANSI Z359.1-07, A10.32-2012

Bolt Under

Bolt Through

Features

• Bolts under the 3 most common 2x4 top chords used in residential framing
• Attaches to 2x6, 2x8 and 2x10 and 2x12 by drilling through the top chord

Package Contents

• 430 stainless steel anchor
• PVC flashing base
• Stem cover with tether
• 6ea. 1-1/4" galvanized teko nails
• 2-1/4"x 5/16" zinc plated grade 8 bolt
• Stainless steel wing nut and lock washer
• Nylock nut
• English/Spanish manual and label

10