


Anchors • ARS Series Tile Roof



Flashing may be painted to match the tile color

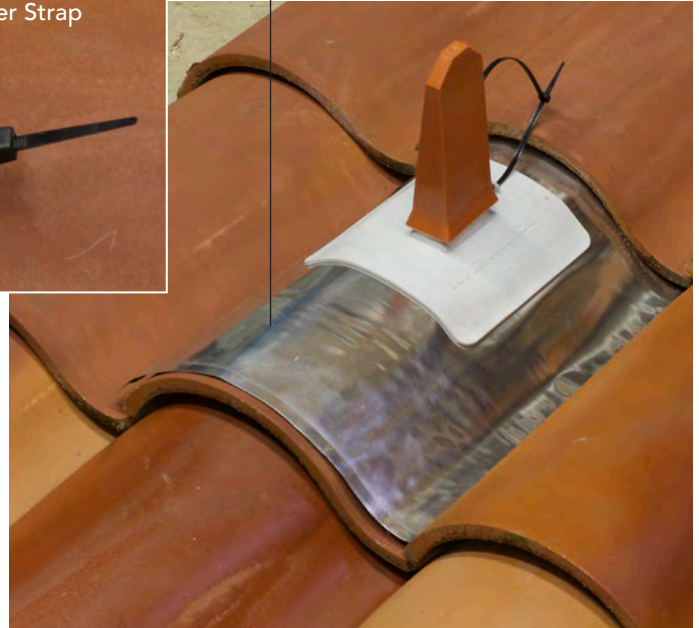

ARS Tile-Roof Anchor Kit

ARS Tile-Roof anchors are fabricated with an 8" stem that is 1.5" longer than our standard ARS anchors. Designed specifically for use with high profile concrete and clay roof tiles. All ARS kits shown here are supplied with the necessary components for a permanent waterproof installation onto wood framed structures. The aluminum flashing base is easily formed to fit barrel shape tiles and the stem cover is designed to interlock with the base flashing stem. The fastener pack includes both a stainless steel wing nut for tool free installation and optional nylock nut.

Specification of Use:


Fall Arrest 1 person max. wt. 340lb

Compliance:

OSHA 1926:502, 1910.66ANSI Z359.1-07, A10.32-2012

Features

- Bolts under the 3 most common top chords used in residential framing, 2x4, 2x6 and 2x8
- Attaches to 2x10 and 2x12 by drilling through the top chord

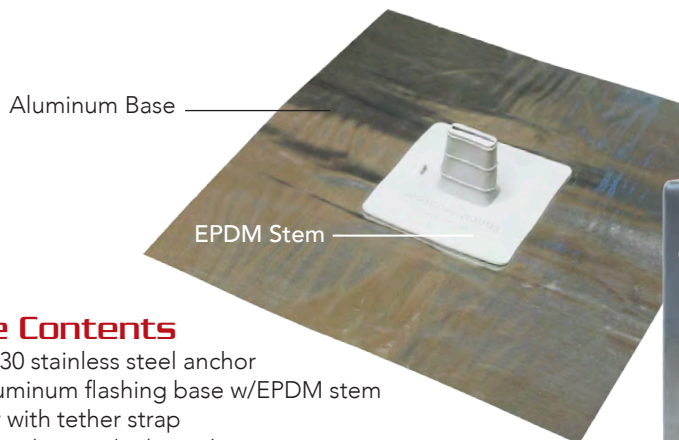

Package Contents

- 14 gauge 430 stainless steel anchor
- 20"x20" aluminum flashing base w/EPDM stem
- Stem cover with tether strap
- 6ea. 1-1/4" galvanized teko nails
- 2-1/4" x 5/16" zinc plated grade 8 bolt
- Stainless steel wing nut and lock washer
- Nylock nut
- English/Spanish manual and label



Stem cover color choices:

