

# Anchors • WS Series

## WS TrussBar™

### No. 2835


The WS-TrussBar is an Super Anchor Safety exclusive. This design is specified for use in attic spaces where other types of fall protection anchors are not practical to install. Manufactured of lightweight aluminum, the WS-TrussBar easily installs to the underside of all standard size top chords and is adjustable for 12", 16" and 24" top chord spacing. The bar legs easily rotate to compensate for imperfect top chord spacing. Use for single person tie-off or horizontal lifeline systems.

Compliance: OSHA 1926.502(b)(4)(i)  
OSHA 1926.1203(e)(2)(ii) / ANSI Z359.1-07

- 5,000lb min. tensile strength
- Lightweight aluminum 6.5lb
- Single person tie off with lifeline or SRL'
- Use with horizontal lifeline systems no. 1335 and 1336 for a maximum spacing of 20ft.
- Use as a permanent tie-off point for attic access as required by confined space standards
- Supplied with 10 re-useable 2" WS wood screws
- English/Spanish instruction manuals
- English/Spanish labels s


Connector ring accepts all types of snap hooks and carabiners

Truss or top chord mounting Ideal for SRL attachment

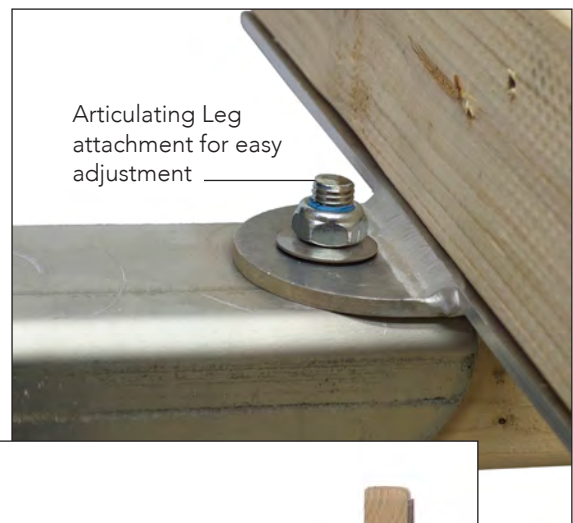

Articulating Leg attachment for easy adjustment

Custom anchors are fabricated to the customer specified dimensions and materials. These anchors can be specified for bolt under or bolt through attachment. Contact the Super Anchor Safety Sales Team for more details and pricing.

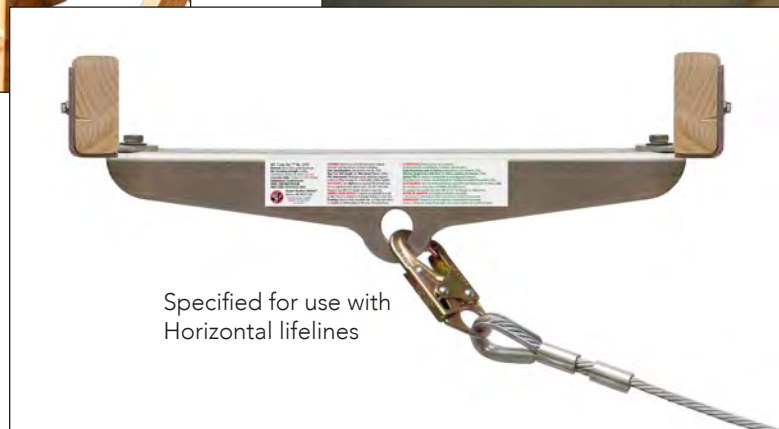

Specified for use with Horizontal lifelines