

Cable Self-Retracting Lifelines




5001-Z
Steel
Carabiner





SideWinder2-LE™

This model features a 100% stainless steel brake assembly plus a No. 6185-LE Energy Absorber.

English/Spanish Manuals



English/Spanish PID Labels



Inspection
Label

Part No.	Cable	Absorber	Connectors
2903-A-EA	30ft	6184-LE	Fall Indicator Swivel Snap hook

Energy
Absorber
No. 6185-LE
310lb max.
user wt.

Component
Length
22.0"

Fall
Indicator
Swivel
Snap Hook

Factory Attached to SRL

Super Anchor Safety
(425) 488-8898
Monroe, WA 98272 USA

FORCE
SAFETY SYSTEMS

SRL Leading Edge Energy Absorber
Absorbedor de Energía

Model: **6185-LE**
SRL + Fall Indicator
Snaphook
Gate Strength 3600lb (1634k)

DOM
Y/M

Meets / Cumple
ANSI Z359.1-07 / CSA 1928.502

Person Capacity	Person Capacidad
100-310lb (45-140kg)	

Max. Arrest Force: **900lb**
Fuerza máxima de detención (4kN)

Max. Elongation: **42"**
Elongación Máxima: **1.06m**

Max. Free Fall: **6ft**
Máxima Caída Libre de: **1.8m**

WARNING: Consult Instruction Manual and inspect before each use. Remove from service if cover is missing, white webbing is visible or subjected to a free fall. Failure to follow instructions for use may result in serious injury or death.

ADVERTENCIA: Consulte el manual de instrucciones e inspeccione antes de cada uso. Retire del servicio si la cobertura no está presente, las correas blancas son visibles o sufrieron una caída libre. El no seguir las instrucciones de uso puede provocar lesiones graves o la muerte.


Absorb-Label IAL-LE
CSN 12-2019
Mfg. USA Monroe WA.
Temple #A2.1 (307)

Fail Safe Design

All SideWinder SRLs have an integrated frame assembly that prevents the connector end from separating in the event the casing is fractured.

Failsafe Advantage

Many SRLs integrate the connector ring into the top of the casing. While strong enough to sustain a free fall, the casing itself is subject to fracture if dropped or abused in handling. A failsafe frame design ensures the connector ring cannot detach from the casing if it is damaged thus providing a higher level of worker safety.

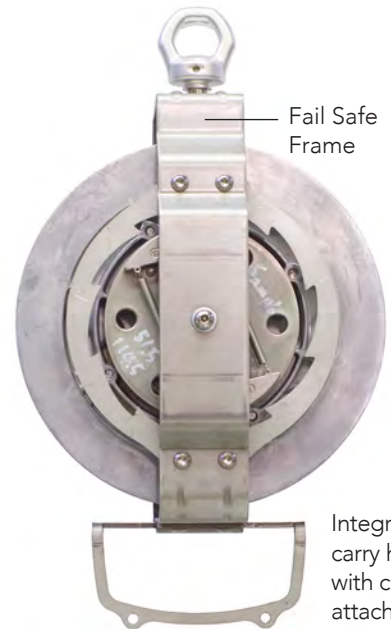

Fail Safe
Frame

Integrated
carry handle
with connector
attachment