


Lanyards and Connector Options

Integral Adjuster Mechanical Rope Grab with Web Lanyard

This is our dual-cam, heavy duty mechanical rope grab with an integrated 18" or 24" web lanyard. You can choose between our ANSI Z359 rated snap hooks, aluminum carabiners or steel carabiners as a connector. These are for use on all 5/8" lifelines. Squeeze with your hand to adjust the grab on the lifeline. During normal operation the rope grab will remain at its fixed position on the lifeline and will lock when subjected to the tension of a sudden force or free fall. Heavy duty design, value priced and durable.

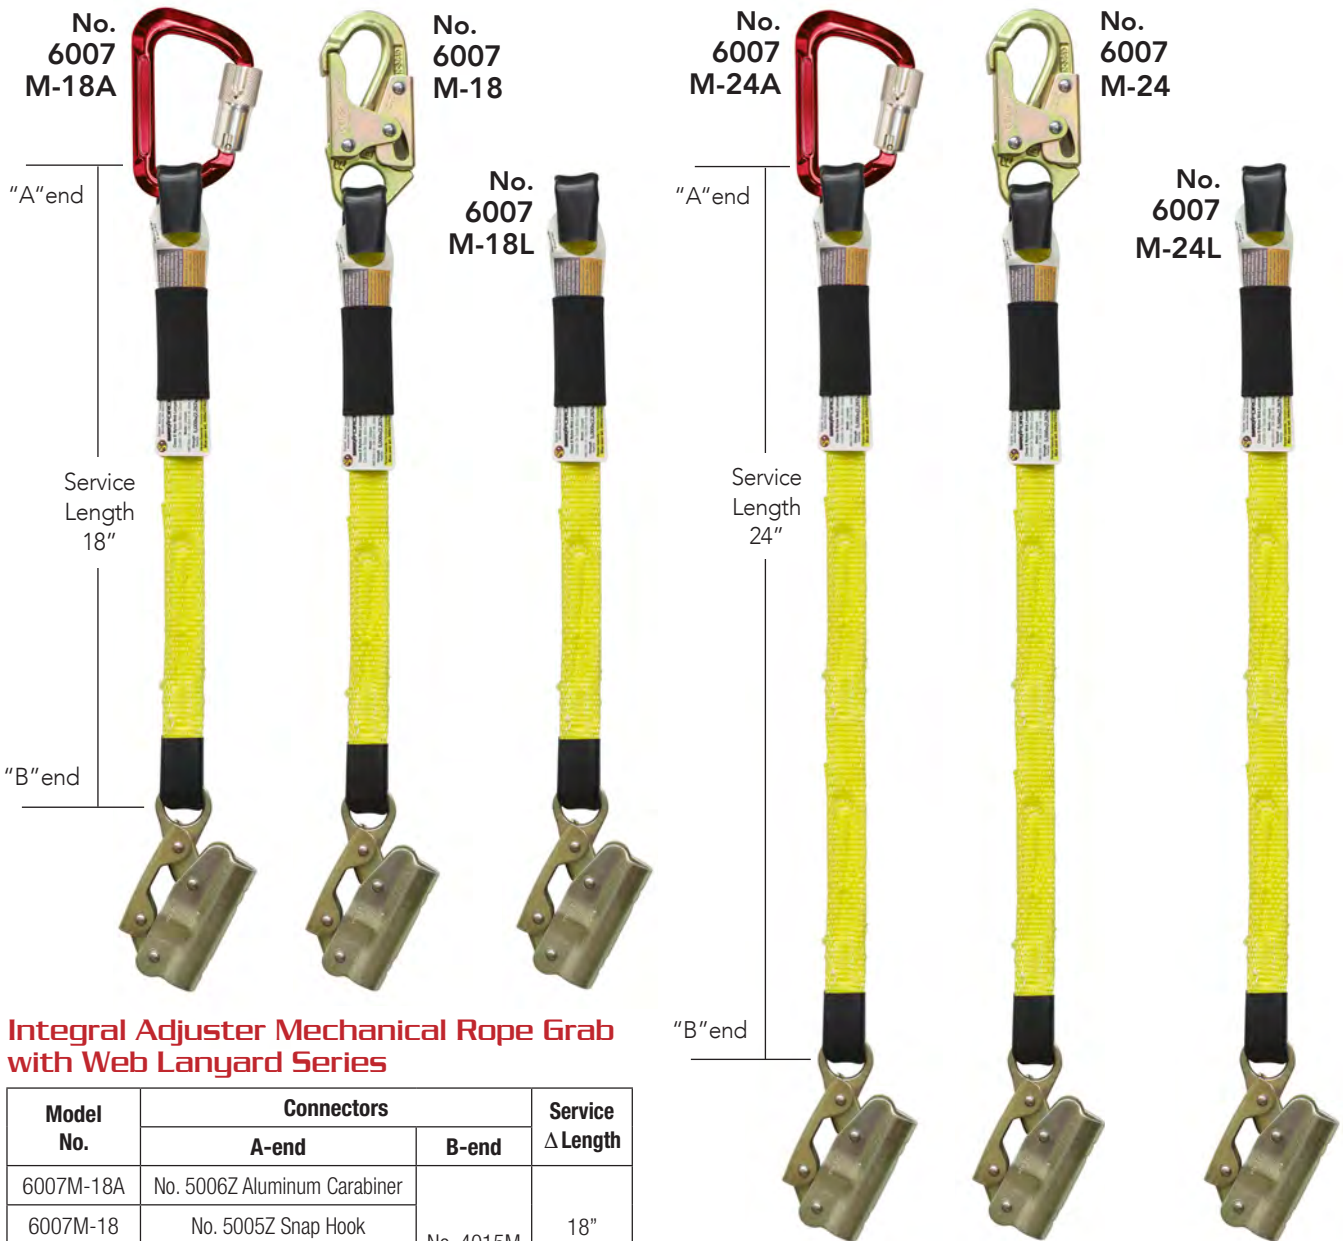

Integral Adjuster Mechanical Rope Grab with Web Lanyard Series

Model No.	Connectors		Service Δ Length
	A-end	B-end	
6007M-18A	No. 5006Z Aluminum Carabiner	No. 4015M Mechanical Rope Grab	18"
6007M-18	No. 5005Z Snap Hook		
6007M-18L	Loop End		
6007M-24A	No. 5006Z Aluminum Carabiner	No. 4015M Mechanical Rope Grab	24"
6007M-24	No. 5005Z Snap Hook		
6007M-24L	Loop End		

Δ Length is measured from "A" end to "B" end after attachment to harness D-ring
 Note that service lengths and weights are approximate.

Features

- Locks automatically on lifeline
- Removable from end of lifeline
- Locks automatically when released
- Dual-cam locking mechanism
- Compatible with all our 5/8" lifelines
- ANSI Z359 Rated Hardware
- 3,600 Pound Gate Strength Connectors