



Lanyards and Connector Options

Wire Rope Lanyards™

These lanyards are fabricated with high strength 7x19 galvanized wire rope. Double swaged with a clear PVC cover. Each lanyard is fitted with a product i.d./specification label and inspection label. Manufactured at our Monroe, WA. factory.

Features

- 3/8" 7x19 Galvanized wire rope w/tensile strength rating of 14,400lb(64kN)
- Heavy gauge galvanized eye thimbles
- Dual swaged aluminum oval sleeves on each end
- Clear PVC swage covers
- Specification label with date of mfg.
- Annual inspection label
- Instruction Manual
- 3,600lb(16kN) gate strength snaphook complies w/ANSI Z359.12-09
- 5,000lb(22.5kN) min. strength rating complies with ANSI Z359.1-07 and OSHA 1926:502
- Max. User wt. 340lb(154kg)

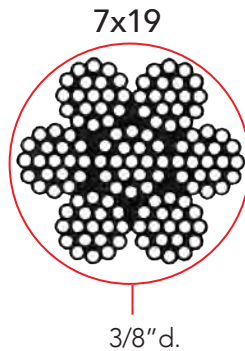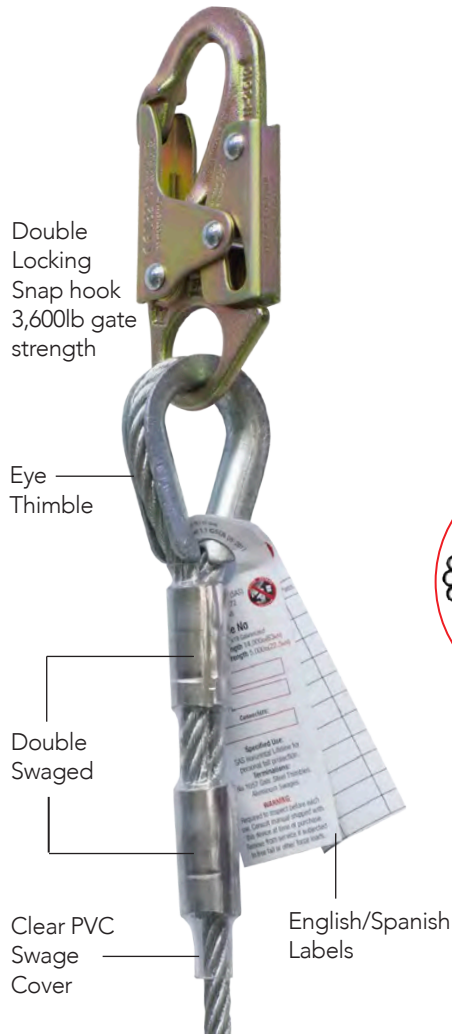

Wire Rope Lanyard No. 1333

Part No.	Ft	A-end	B-end	wt/lb
1333-3	3	Snap Hook	Connector Ring	2.6
1333-4	4			2.9
1333-5	5			2.12
1333-6	6			2.15
1333-7	7			3.2
1333-8	8			3.5

No. 1334
"A-end"
Snap Hook



No. 1333
"A-end"
Snap Hook



Length is measured from snap hook to eye thimble

Wire Rope Lanyard No. 1334

Part No.	Ft	A-end	B-end	wt/lb
1334-3	3	Snap Hook	Snap Hook	3.3
1334-4	4			3.6
1334-5	5			3.9
1334-6	6			3.12
1334-7	7			3.15
1334-8	8			4.1

Length is measured from snap hook to snap hook

"B-end"
Connector Ring

"B-end"
Snap Hook