



CRZ Pass-Thru
Intermediate HLL Anchor Only
5,000lb Min. Tensile Strength
DO NOT PROOF LOAD


CRZ-AP ☐ **Standard Base Plate**

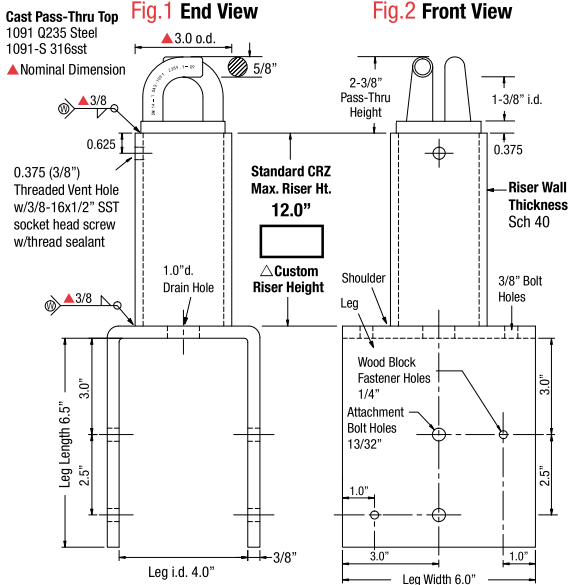


CRZ-BP ☐ **Standard Base Plate**

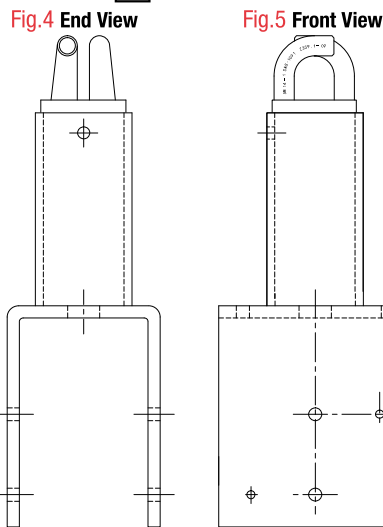

Pass-Thru Top Orientation A

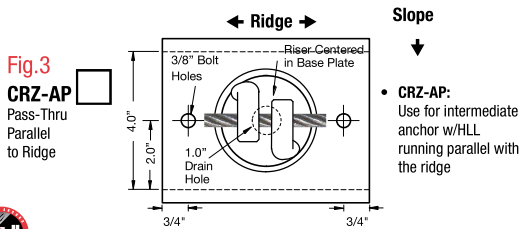

Pass-Thru Top Orientation B

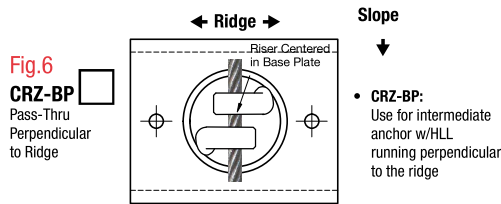

Part No.:	1126-PX	Index Pg.6
Part Name:	CRZ-AP ☐ CRZ-BP ☐	Date:
Project Name:		By:
Contractor:		
Address:		
No.	No.	Lead Time
CRZ-A	CRZ-B	

Anchor Material Specifications

Riser Ht. ☐ Sch 40 ☐ 0.203 ☐ Foam Filled ☐ No Foam ☐ HDG Finish ☐ 304 sst ☐

Pass-Thru Top Type	Orientation	Weight
1091 ☐ 1091-S ☐ Q235 ☐ 316sst ☐	A ☐ B ☐	

Pass-Thru Tops are imported cast steel 12" Riser 18lb

Riser wt/inch: Sch 40=0.487
Base Plate: 11lb
1091/1091-S Pass-Thru Top = 11lb

Imported Steel ☐ Certified A-36 Steel ☐ 97% USA Mfg. ☐

Loop Top A/B Orientation

Standard CRZ's are specified for Z-Purlins running parallel with the ridge/perpendicular to the slope.

△ CRZ Riser Heights

CRZ riser heights taller than 12" require 3rd party structural analysis

Sign-Off Required to Order

Terms:

Anchor specified on this plan are custom mfg. and are not returnable after fabrication has been authorized by the customers purchase order. A 50% deposit or house credit account is required to begin fabrication and the balance paid upon completion or credit terms.

Authorization for Fabrication

I accept the fabrication specifications, number of units required, project name or customers name, are correct as shown on this plan.

Print Name _____ Date: _____

Sign Name _____

Expires in 30 days from date of customers PO.

Instructions: Sign authorization and include company or dealers purchase order.
Note: Steel prices are subject to change without notice. Unit price quotes are guaranteed only when a PO and deposit have been received. Written or verbal quotes expire after 15 days. Request re-quote before ordering.

