Standing Seam Anchor VLL Rigging Examples

Standard VLL Rigging Example



CRA "A" End Anchor

Direction of Slope

HLL Accessories

O-Rings



CRA-PT Pass-Thru Intermediate Anchor

CRA-4 "B" End HLL Intersection



HLL Accessories

CRA-4 "A" End HLL Intersection

HLL Accessories Not Shown



CRA-PT Pass-Thru Intermediate Anchor

O-Rings



CRA "B" End Anchor

Standing seam anchors used for VLL's and HLL's are position oriented by rotating bolt attached base plates 90°. CRA-4 4-Way anchors are used to intersect a HLL at the ridge, eave, or any point along the VLL as shown in the example here. **Riser Height:** Standing seam bolt attached anchors have a 5" max. riser height to minimize stress applied to the panel seams.

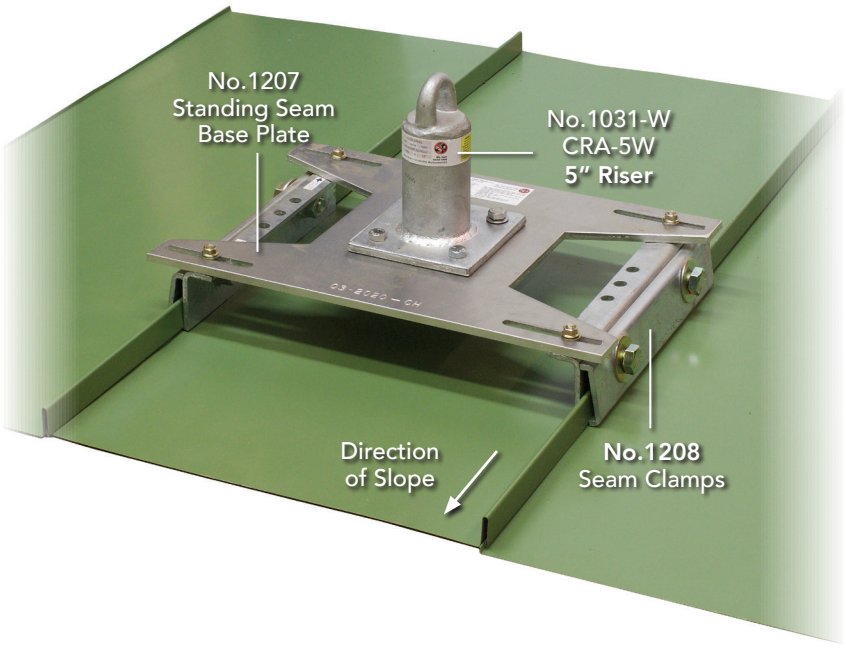

Intersecting HLL System

CRA-PT Pass-Thru Intermediate Anchor

O-Rings

CRA "B" End Anchor
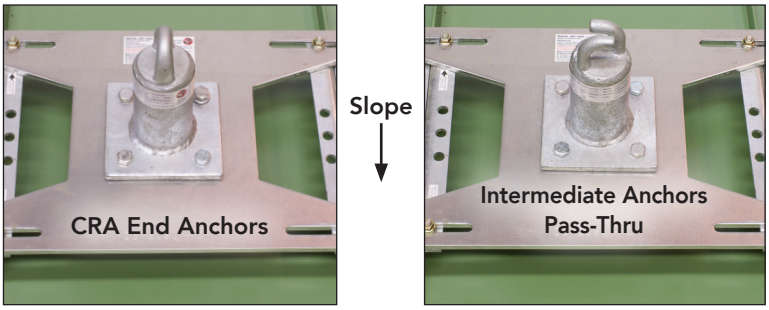
VLL Loop Top/Pass-Thru Rigging Orientation