

# HLL System Components

## 4-Way HLL Anchors

- Use for rigging several HLL runs in series, at 45 or 90 deg. angles
- Bolt/field weld/concrete embedment installation
- 5,000lb min. tensile strength
- 1-3/8" i.d. cast loop top
- Hot dip galvanized (G) or 304sst (S)
- 4-Way attachment bolt
- Foam filled riser
- English manual
- ANSI Z359.18-17 type A/T\*
- CSA Z259.15.22 type AT
- \*3rd party engineering reports upon request

## Ordering Information


| Part Name | Part No. | Riser Ht. | Base Plate   | Type    | wt.  | 4-Way Top     |
|-----------|----------|-----------|--------------|---------|------|---------------|
| CRA-4-12  | 1032-4G  | 12"       | 16"x16"x3/8" | 52 Hole | 35lb | 1054-G HDG    |
| CRA-4-18  | 1033-4G  | 18"       |              |         | 38lb | 1054-S 304sst |
| CRA-4-24  | 1042-4G  | 24"       | 16"x16"x5/8" | 16 Hole | 65lb | wt. 6.5lb     |

Note: 304sst: CRA-4 specify 4S.

## 4-Way Top



4 Hole Custom Base Plate Shown

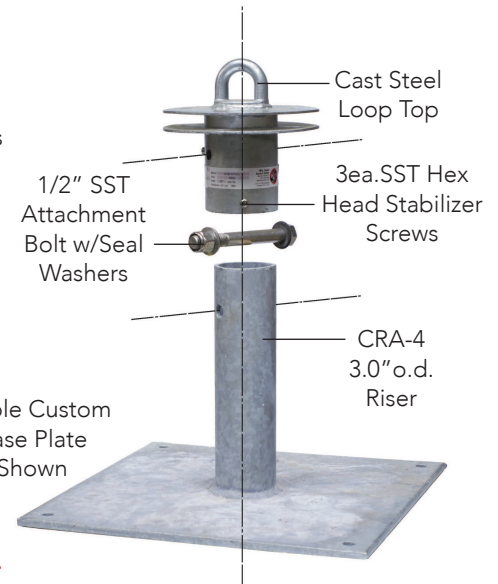

## No.1050-G HLL Rigging Kit


### No.1050-G Kit Contents

| Part No.   | No.Pcs | Finish  | Description         |
|------------|--------|---------|---------------------|
| 5010-SM    | 4ea    | Zinc    | HLL O-Rings         |
| 1058       | 1ea    | 18-8sst | 3/4"x14" Turnbuckle |
|            | 2ea    | 304sst  | 5/8"x3.0" Bolts     |
| 1087-SC    | 2ea    | 304sst  | Absorber Couplers   |
|            | 2ea    | 18-8sst | 3/8"x1.0" Bolts     |
|            | 1ea    |         | 5/8"x2.0" Bolt      |
| 1065-AS    | 1ea    | 304sst  | Spring Absorber     |
| 1081-S     | 1ea    | 304sst  | Coupler             |
|            | 1ea    | 18-8    | 5/8"x2.0" Bolt      |
|            | 1ea    |         | 9/16"x2-1/4" Bolt   |
| 4-Way Bolt | 1ea    | 18-8    | 9/16"x3.0" Bolt     |
| 1057       | 2ea    | HDG     | 3/8" Eye Thimble    |
| 1056       | 6ea    | HDG     | 3/8" Cable Clamps   |

## HLL Rigging Components

- Specified for SAS HLL systems
- Includes all parts for complete on site installation
- All components 5,000lb min. tensile strength
- 4-Way attachment bolt
- English manual
- ANSI Z359.1
- OSHA 1926.502
- \* 3rd party engineering report upon request

## HLL Cable (Wire Rope)

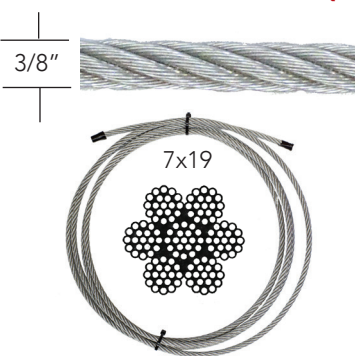

Note: SAS adds an additional 4ft to the HLL cable length as measured from each end anchor or 4-Way top.




## Ordering Information

| Part Name       | Part No. | Type            |          |       |
|-----------------|----------|-----------------|----------|-------|
| HLL Rigging Kit | 1050-G   | Galvanized      |          |       |
|                 | 1050-S*  | Stainless Steel |          |       |
| HLL Cable       | Part No. | Type            | Strength | wt/ft |
| 3/8"x7x19       | 1055-X   | Galv.           | 14,000lb | 0.243 |
|                 | 1055-SX  | 316sst          | 12,500lb |       |

\*Stainless steel rigging kit.  
Consult SAS Commercial Anchor Catalog.

## SAS Standard HLL Rigging Example

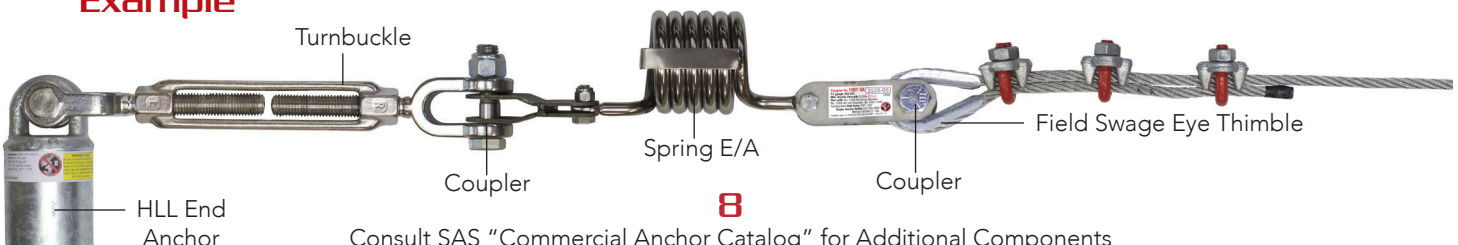

Consult SAS "Commercial Anchor Catalog" for Additional Components

[www.superanchor.com](http://www.superanchor.com) 1-855-301-4575

Super Anchor Safety Best Sellers Vol.1 02-2025 ©SCN [R]