



# SUPER ANCHOR SAFETY®

**WINDER-LE**  
LEADING EDGE SELF RETRACTING LIFELINE

Class


**2**

Anchor above or  
below dorsal D-ring


**No.5001-Z**  
Auto-Lock  
Carabiner

**Fall Arrest Brake System**  
Stainless steel for extended  
service life in salt air  
environments

Steel  
Cable  
Guide

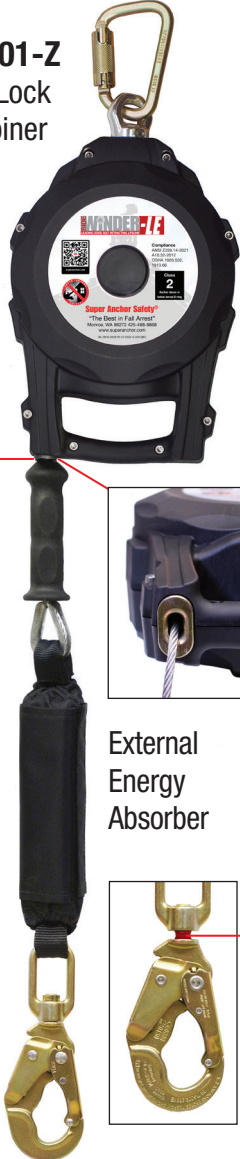

External  
Energy  
Absorber

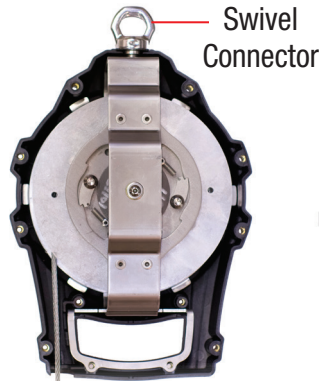

**Fail Safe  
Casing Design**

The swivel connector  
is attached to a sst frame  
that does not depend on  
the polymer casing to  
arrest a fall.

Fall  
Indicator  
Swivel  
Snaphook

**50ft Tag  
Line**



## SRL Specifications

**Compliance:** ANSI Z359.14-21

**Rebarhooks:** Z359.12-2019

**Leading Edge/Overhead Use:**

**Max. User wt.:** 130-310lbs including tools and equipment.

**Cable:** 3/16" length galvanized steel.

**Brake System:** Stainless steel

**Avg. Arrest Force:** 1,350lbs

**Max. Arrest Force:** 1,800lbs

**Max. Deceleration Distance:** 36"

**Min. Setback From Leading Edge:** 2ft

## Leading Edge Use



Overhead



Below Dorsal D-ring


**Max. Free Fall: 2ft**  
**Min. Fall Clearance: 6.5ft**

**Max. Free Fall: 5ft**  
**Min. Fall Clearance: 18'-6"**


## 42 Page Instruction Manual

Over 125 full color illustrations designed for user training, inspections, length of fall charts, maintenance and hazard warnings.


Spiral Bound Manual



Inspection Guide




Inspection Log



Retail Box



Daily user Log



Live data entry forms  
available on line.

## Ordering Information

| Part No.   | Cable Length | Wt   |
|------------|--------------|------|
| 2903B-LE30 | 30ft         | 16lb |
| 2901B-LE50 | 50ft         | 18lb |

Super Anchor Safety Factory Service