




SUPER ANCHOR SAFETY®

TOSS'R-LE™

No.2991-LE10 Twin SRL-LE

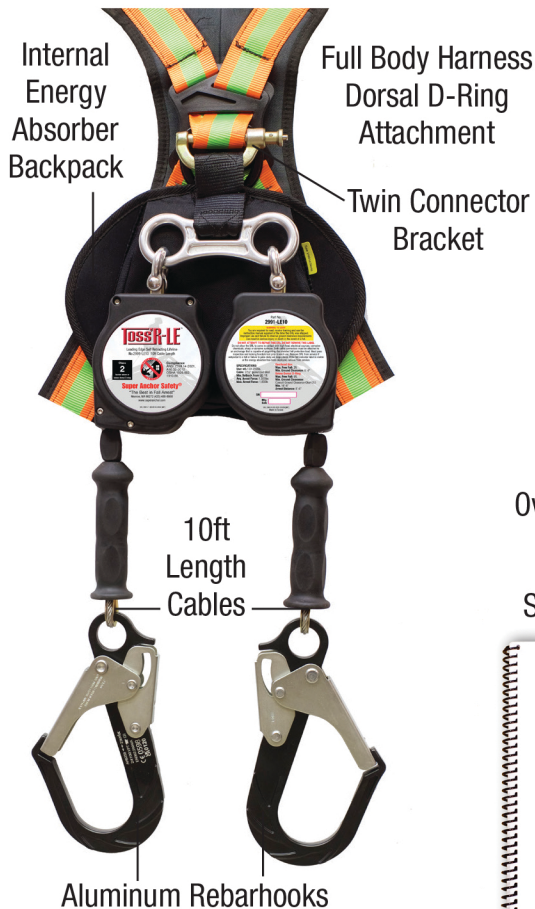

SRL Specifications

Compliance: ANSI Z359.14-21

Rebarhooks: Z359.12-2019

Leading Edge/Overhead Use:

Max. User wt.: 130-310lbs including tools and equipment.

Cable: 3/16" x 10ft length galvanized steel.

Avg. Arrest Force: 1,350lbs

Max. Arrest Force: 1,800lbs

Max. Deceleration Distance: 30"

Min. Setback From Leading Edge: 1ft

Non-Serviceable SRL-LE

Weight: 11lb

Leading Edge Use

Overhead

Below Dorsal D-ring



Max. Free Fall: 2ft
Min. Fall Clearance: 6.5ft




Max. Free Fall: 5ft
Min. Fall Clearance: 16'-6"


42 Page Instruction Manual

Over 125 full color illustrations designed for user training, inspections, length of fall charts, maintenance and hazard warnings.


Spiral Bound Manual

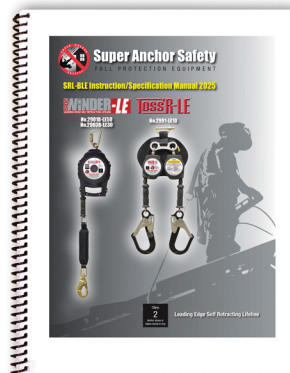

Inspection Guide

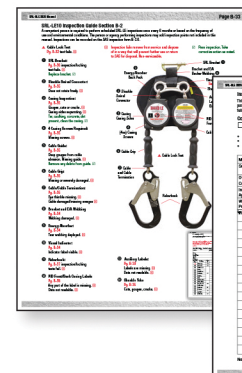


Inspection Log



Retail Box



Daily user Log



Live data entry forms available on line.