



SUPER ANCHOR SAFETY®

No.6014-72A Adjustable Web Lanyard

Description:

Adjustable length web lanyard specified for fall restraint use. Attaches to full body harness dorsal D-ring or side D-rings.
Request mfg. at **SAS** Monroe, WA factory.

Performance Specifications

- Max. user wt. 310lb (140kg)
- Max. service length 72" (1.8m)
- Min. service length 48" (1.2m)
- USA mfg. 8,700lb 1.0" nylon webbing
- Min. tensile strength 5,000lb (22.5kN)
- 5,000lb zinc plated adjuster buckle
- Lanyard wt. 36oz
- Serial numbered
- Complies with ANSI Z359.1
- English/Spanish Labels

Snaphooks:

- 3,600lb (16kN) gate strength zinc plated snaphooks comply with ANSI Z359.12-09

Package Contents

- 1 ea No.6014-72A adjustable web lanyard
- Instruction manual


PID Primary Label

Date of mfg. YYYY-MM



Model: 6014-72A
Adjustable Length Web Lanyard
2 Snaphooks • Adjuster Buckle
Max. Length: 72" (1.8M)
WARNING! Work Positioning Only.
Do Not Use for Fall Arrest.
DOM / DF
YIM-AJM
2022-II
Webbing Tensile Strength 8,700lb (39kN)
Min. Strength 5,000lb (22.5kN)
Made in SAS Factory USA

Warning! Keep away from high heat, open flame and avoid sharp edges. Remove from service if subjected to a free fall, webbing is cut or stitches are broken. Failure to follow instructions for use may result in serious injury or death.
¡ADVERTENCIA! Manténgase lejos de calor, flama y evita los bordes afilados. Retire del servicio si se somete a una caída libre, el tejido se corta, o las puntas se rompen. El no seguir las instrucciones de uso puede resultar en lesiones graves o la muerte.




Inspection Label

User enters date of first use here.

Serial No.


Inspection				Serial No.			
Date of First Use				No. de serie:			
MM	YY	By	Pass	MM	YY	By	Pass

WARNING! You are required to read and use the instruction! Specification manual supplied at the time this device was shipped. Improper use and installation can result in serious injury or death. Follow inspection requirements before each use.
¡ADVERTENCIA AL USUARIO! Usted tiene la obligación de leer y usar el Manual de Instrucción Especificación suministrado cuando este dispositivo fue enviado. El uso e instalación inadecuados pueden resultar en lesiones graves o la muerte. Sigue los requisitos de inspección antes de cada uso.



Instruction Manual

English 2 page

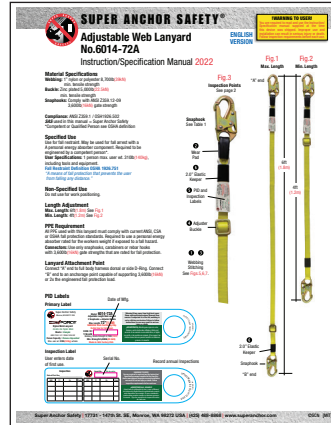

Retail Package



PVC
Wear
Pad

2.0"
Elastic
Label
Keeper

PID
Labels

Adjuster
Buckle

No.6014-72A
"A" end
Snaphook



Min.
Service
Length
48.0"

Max.
Service
Length
72.0"



2.0"
Elastic
Keeper

"B" end
Snaphook

