

# Fall Arrester/Rope Grabs

Personal fall protection lifelines require a rope grab for position adjustment. SAS offers 4 different models that are compatible with 5/8" d. synthetic rope. Supplied in retail packages with PID, inspection labels and instruction manuals.

## No.4015-Z Features

- Zinc plated steel 16kN tensile strength
- Panic grab function
- Single direction locking
- Use with 5/8" (16mm) lifelines

### Compliance


ANSI Z359.15-14

## No.4015-Z Fall Arrester w/Panic Grab

Industry standard mechanical rope grab with a hinged gate for easy attachment or removal from the lifeline.



## No.4015-M Integral Adjuster

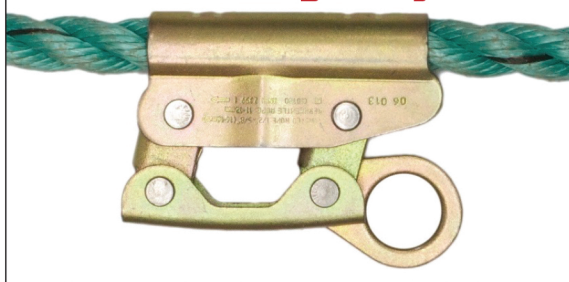

## No.4015-M Features

- Zinc plated steel 16kN tensile strength
- Captive lifeline attachment
- Single direction locking
- Use with 5/8" (16mm) lifelines

Industry standard mechanical rope grab easily adjusts position up or down on the lifeline. Captive type is not removable.

**Compliance:** ANSI Z359.15-14

## All Rope Grabs Shipped in a Retail Package



## Non Mechanical Prussic Type Rope Grabs

A best seller for over 30 years. Easily adjusts up or down on the lifeline, holds position and locks in both directions. **Certification:** 3rd party engineering report and US Dept. of Labor (OSHA) compliance letter is available on request.

## No.4015 SuperGrab™



## No.4015 Features

- Ergonomic hand hold w/fall indicator function
- 5,000lb min. tensile strength
- Captive lifeline attachment
- Use with 5/8" and 3/4" lifelines

## Ordering Information

Part No.	Type	Attachment	Deceleration
4015-Z	▲ Fall Arrester	Removable	Avg. 24"
4015-M	▲ Integral Adjuster	Captive	Avg. 12"
4015	SuperGrab™		
4015-V	ValueGrab™		

▲ Single direction locking.

## No.4015-V ValueGrab™



## No.4015-V Features

- 5,000lb min. tensile strength
- 3,600lb gate strength snaphook
- Aluminum swage w/PVC cover
- Captive lifeline attachment
- Use with 5/8" and 3/4" lifelines