

Fall Arrester™ Lifelines

Maxima FA Fall Arrester Lifelines

A unique design that combines the lifeline with a factory attached energy absorber reducing the component bulk that normally attaches to the full body harness dorsal D-ring. These Fall Arresters are manufactured at our Monroe, WA factory and are available in two models with either the Maxima or Value Lifelines. Custom lengths are available upon request. All components comply with ANSI Z359.1-07 and OSHA 1926.502.


Complete System No. 5501

18"x1"
Nylon Web
Lanyard



4015-M
Dual Cam
Integral
Adjuster

Lifeline No. 5500

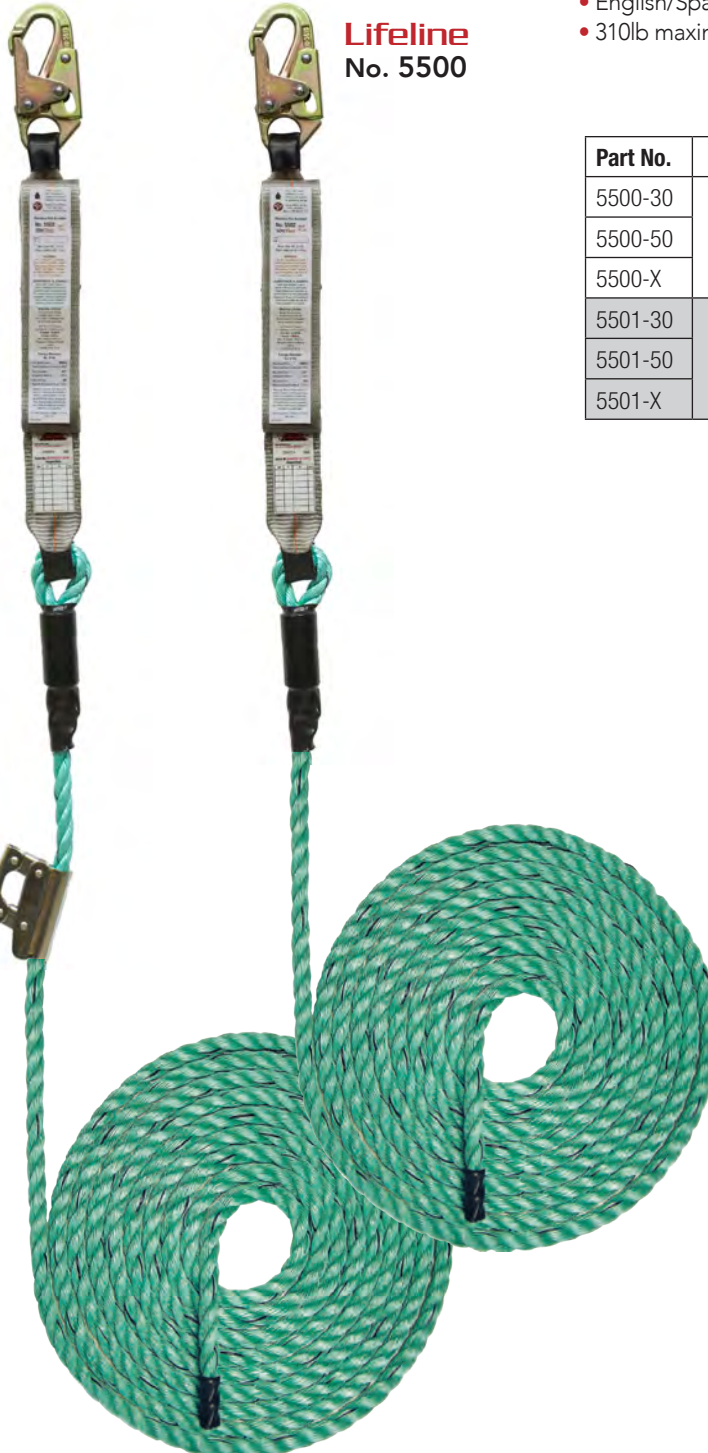

Fall Arrester Specifications:

- No. 6180 Energy Absorber with factory attached snap hook
- 3,600lb gate strength connectors
- Aluminum swaged lifeline with PVC shrink tube cover
- Adhesive PVC end termination
- Serial numbered
- English/Spanish inspection fall Indicator and PID labels
- 310lb maximum user weight

Part No.	Model	Lifeline	Length	wt/lb
5500-30	Maxima FA Lifeline	Co-polymer 10,582lb min. Tensile Strength	30ft	8
5500-50			50ft	9
5500-X			Custom	
5501-30	Maxima FA System		30ft	10
5501-50			50ft	11
5501-X			Custom	

Retail Pack



2018 20 page
English/Spanish Manual

