



SUPER ANCHOR SAFETY

SAS Lifeline Instruction Manual 2014.1

MAX FORCE™ 12 strand w/rope grabs

FALL PROTECTION EQUIPMENT

!WARNING TO USER!
 You are required to read and use the Instruction/Specification manual supplied at the time this device was shipped. Improper use and installation can result in serious injury or death. Follow inspection requirements before each use.

Material Specification:	Rope Grab Types Specified for Use:		
Device: 12 strand lifeline. Fig.1 Diameter: 5/8" (16mm) Material type: Poly-olefin Min. Tensile: 11,600lb (52kN) % Elongation: 4% @ 8kN Compliance: ANSI Z359.1-07 CSA Z259.2.5-2012 Specifications of Use: One person PFAS system w/tools. Max wt.: 310lb (140kg) w/E-4 absorber or 386lb (175kg) w/E-6 absorber.	Device: Super-Grab 4015 Captive bi-directional lock, adjustable diameter. Fig.2 Max. Deceleration: *12" (300mm) Fabric: 7/16" (11mm) Nylon/Poly Avg. Tensile: 7,400lb (34kN) Strength Rating: 5,000lb (23kN) Use For: 5/8" (16mm) diam. rope. Compliance: OSHA 1926:502 *Requires use of energy absorber.	Device: Integral Adjuster 4015M Captive single direction lock. Fixed diameter. Fig.3 Max. Deceleration: *24" (600mm) Material: Zinc plated steel Min. Breaking: 3,600lb (16kN) Use For: 5/8"-7/8" (16-22mm) diam. rope. Compliance: OSHA 1926:502 ANSI Z359.1-07 CSA Z259.11-05 *Requires use of energy absorber.	Device: ADP Fall Arrestor 4015C Removable single direction lock. Fixed diameter. Fig.4 Max. Deceleration: *24" (600mm) Material: SST Min. Breaking: 3,600lb (16kN) Use For: 5/8" (16mm) diam. rope. Compliance: OSHA 1926:502 ANSI Z359.1-07 CSA Z259.2.5-2012 *Requires use of energy absorber.

Attaching Lifeline To Anchorage

Connect Snap-Hook "A" end of lifeline **ONLY** to an anchorage device that complies with OSHA 1926 or ANSI Z359.1-07 section 7.2.3 capable of supporting 2x the maximum arrest force of an engineered system or 5,000lb (23kN).

Reverse Attachment: Lifeline "A" end may be connected directly to a full body harness dorsal or side D-ring using Value Grab 4015V as specified in SAS-Reverse Rigging instructions.

HAZARD WARNING! Failure to avoid hazards and use lifeline as specified in this manual may lead to serious injury or death!

Connector Compatibility

Rope Grabs 4015/4015M/4015C require class 1 connectors. Use snaphooks or carabiners that are compatible with attachments and are ANSI or CSA certified for fall protection use. Do not link two connectors together or make more than 1 attachment to a connector.

!WARNING!

DO NOT CONTACT lifeline or PPE components with:

- Sharp or abrasive edges, cutting tools
- Electrical sources or power lines
- Open flame, high heat, hot asphalt
- Adhesives, or any type of petroleum solvents, caulking, paint, or stains

DO NOT WRAP or tie a lifeline around wood or steel structures, framing, to another lifeline, lanyard, scaffolding or vehicle.

DO NOT USE lifeline for hoisting, towing or animal tether. Do not link two lifelines together without an engineered system.

Maintenance

To prevent rust, mildew and deterioration, always store lifelines and rope grabs by hanging in a dry area. Never store wet in a confined space. Clean lifelines with an air hose or low pressure water and mild detergent. Keep away from salt water.

WARNING! Synthetic fibers are damaged by mildew, extreme temperatures and extended exposure to UV.


SERVICE LIFE is based on frequency of use, environmental conditions, and normal wear and tear. A plan for removing equipment from service should be determined by a competent person or safety consultant.

Slope:
 Min. Horizontal
 Max. Vertical

△ Note: 3600lb gate strength connectors that comply with CSA Z259.12-11 are required for all devices used in Canada. Connectors used in the USA are not required to comply with ANSI Z359.12-09 unless specified by the user. Compliance standard will be marked on the device.

Part No./Table 1		Connectors				Rope Grab					
Model No.	Length		CSA		None	SH	CAR	4015	4015M	4015C	See
	Ft.	M	Yes	No							
4001	30	9			X						Fig.2
4002	50	15					X				
4009	30	9		X		X					
4010	50	15				X					Furnished without Rope Grab
4031	30	9									
4032	50	15									
4033	30	9				X					
4034	50	15									
4035	30	9					X				
4036	50	15									Fig.3
4009M	30	9									
4010M	50	15						X			
4035M	30	9					X				Fig.4
4036M	50	15									
4009C	30	9				X					
4010C	50	15							X		
4035C	30	9					X				
4036C	50	15								X	

4012 - Custom Length. Specify rope grab type and connector

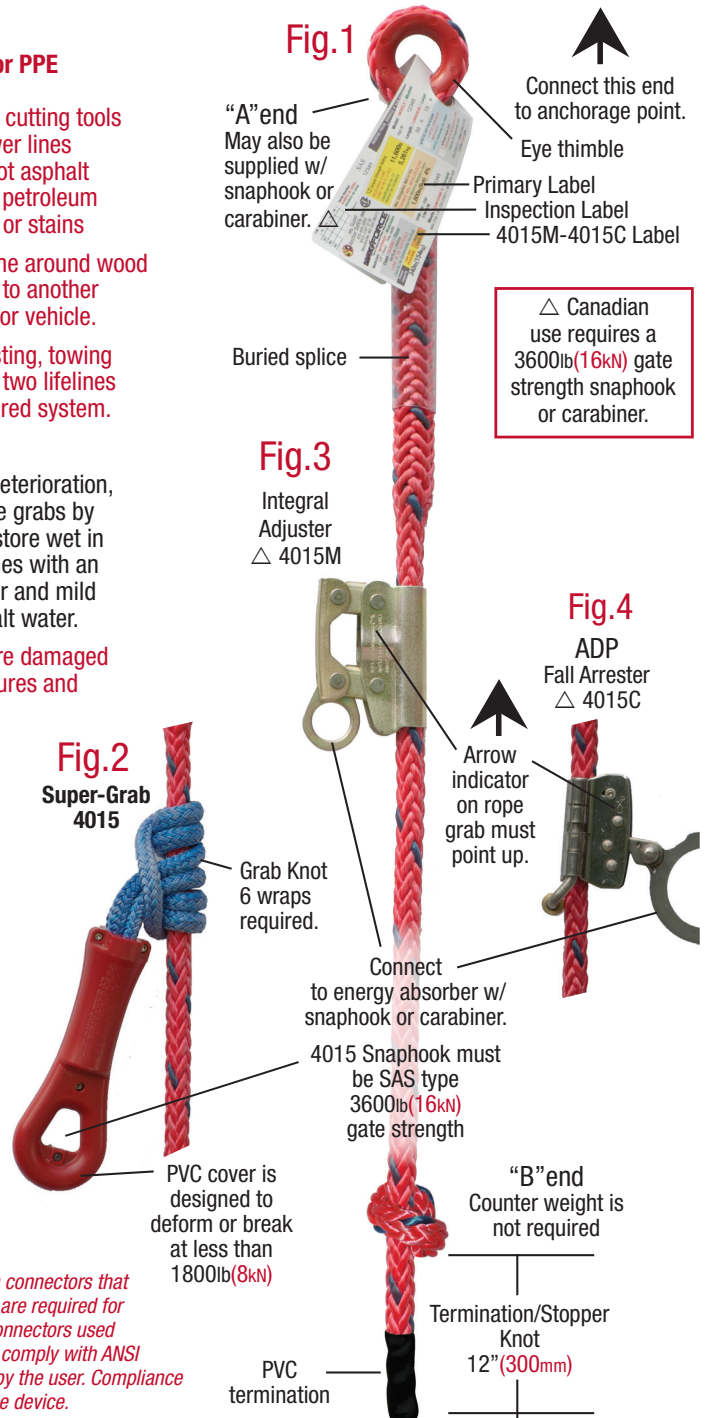

Inspect Before Each Use!

Prior to each use, inspect and perform function tests for all components. Annual inspections should be done at least once a year by a competent person and recorded on the matrix label. See Fig.11. A record of inspections, repair, and removal of equipment from service should be maintained for each component. The following inspection points are a guideline of common conditions that occur as a result of abuse, poor maintenance or long service life.

Remove equipment from service if any of the following conditions are present:

- 1) Subjected to a free fall or other force.
- 2) Obvious damage to any component.
- 3) Warning labels missing or not legible.
- 4) Has not been inspected annually.
- 5) Fails to pass inspection/function tests.
- 6) Paint, caulk, asphalt, rust or any type of material that impedes function or causes fiber or material deterioration.

The following conditions require removal from service or repair at SAS factory or by a competent person.

ACTION REQUIRED: ☒=Remove ☑=Repair. ①=Inspection points

Lifeline and Super-Grab 4015: Figs.5-6-6.1.

- | | |
|--|---|
| 7 Strands are cut or hocked. ☒ | 12 Grab Knot is less than 6 wraps. ☑ |
| 8 Thimble missing, broken, deformed. ☒ | 13 Knots are tied on lifeline above termination knot. ☑ |
| 9 PVC cover is missing. ☒ | 14 If Knots can not be removed. ☒ |
| 10 PVC cover is cracked. ☒ | 15 Termination knot is missing. ☑ |
| 11 Cover screws are missing. ☒ | |

Rope Grab 4015M-4015C: Figs.7-8.

- | | |
|---|---|
| 16 Arrow position is upside down. ☑ | 19 Grab is locked onto lifeline or won't move position easily. Clean lifeline and retest. If no change: ☒ |
| 17 Body or Locking Cam bent, twisted or missing rivets. ☒ | |
| 18 Won't hold static position on lifeline. ☒ | |

Webbing Components: Fig.9.


- | | |
|---|--|
| 20 Loop wear pads are missing or worn through to primary webbing. ☒ | 23 PVC cover is missing or damaged. ☒ |
| 21 Stitching/webbing are cut or damaged. ☒ | 24 Fall indicator warning "Remove From Service" is visible or missing. ☒ |
| 22 Webbing overlaps are separating. ☒ | 25 Fails webbing inspection. ☒ |

Snaphook-Carabiner: Page 3.

- | | |
|-------------------------------------|--------------------------------------|
| 26 Obvious damage/missing rivets. ☒ | 28 Gate locking device is damaged. ☒ |
| 27 Gate is bent or won't close. ☒ | 29 Carabiner won't lock closed. ☒ |

ADVISORY ! Equipment removed from service should be disposed of in a way that prevents further use.

Fig.5 "A" end attaches to anchorage point.

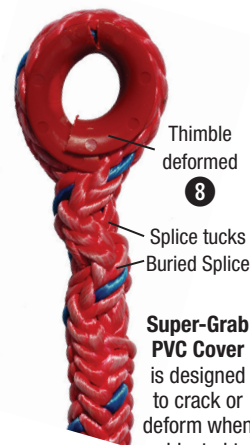


Thimble deformed ⑧
Splice tucks
Buried Splice

Super-Grab PVC Cover is designed to crack or deform when subjected to a free fall. Inspect the "A" cover end and remove from service if evidence of fractures, stress marks or cracks. ☒ See Fig.6.1.

10
Cut strands ⑦

Absorber factory attached to rope grab.

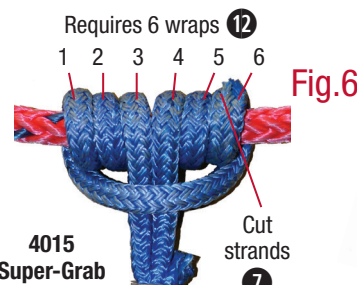

4015 Super-Grab


Requires 6 wraps ⑫
1 2 3 4 5 6

Fig.6

Cut strands ⑦

Red PVC splice cover is missing ⑨


Fig.6.1

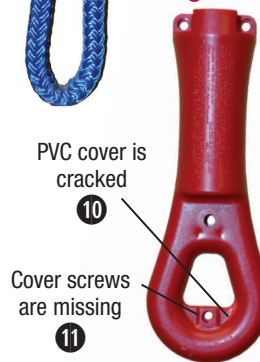

PVC cover is cracked ⑩

Cover screws are missing ⑪

Fig.9

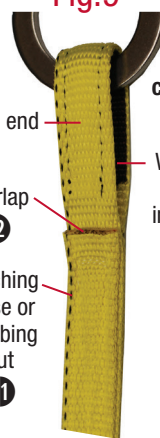

Loop end
Overlap ⑫
Stitching loose or webbing cut ⑮

Webbing connecting lanyard.
Wear pad inside ⑯

Fig.7 4015M Integral Adjuster

Body Rivets ⑰
Arrow position wrong. Grab is upside down. ⑰

Locking Cam ⑰

Fig.8

4015C ADP Fall Arrester
Arrow position wrong. Grab is upside down. ⑰

Rivets ⑰
Body ⑰

WARNING! 4015M-4015C are single direction locking devices that must be installed with the arrow indicator pointing up-slope to the lifeline anchorage point "A" end or they will not lock in the event of a free fall.


Fig.12 Absorber serviceable condition.



Red ▲ arrow may not be visible on some models and does not indicate deployment

Inspection matrix label.

Fig.11 Energy absorber has been deployed.

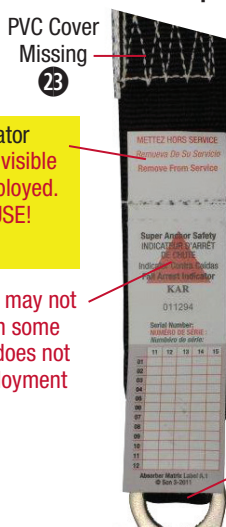


PVC Cover Missing ⑮

Fall Indicator WARNING is visible Absorber deployed. DO NOT USE! ⑮

Wear Pad outside ⑯

Fig.10

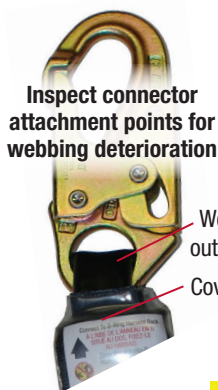

Inspect connector attachment points for webbing deterioration

Wear pad outside ⑯
Cover webbing


Connectors: Gates are designed to remain closed during use and are fitted with gate locks to prevent accidental disengagement.

Fig.13a Snaphook




Gate Locked

Fig.13b



Un-lock gate

Fig.13c



Gate open




Fig.14a



Fig.14b




Fig.14c


Auto-Lock Carabiner

Perform same tests for thread-lock carabiners.

Fall Arrester 4015C


Locking cam is activated by force applied to the connector ring. Remove by opening gate. **Mobility:** move position by pulling or pushing device up or down on the lifeline or hold cam-lock open.

Fig.16a Cam-lock Test

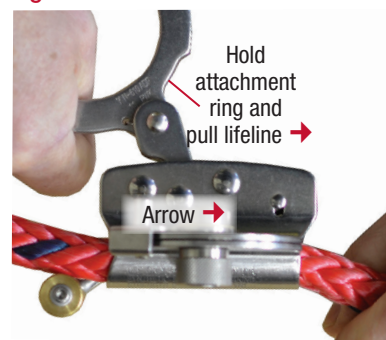


Lifeline does not move = Pass
Lifeline moves = Fail

Fig.16b Mobility test

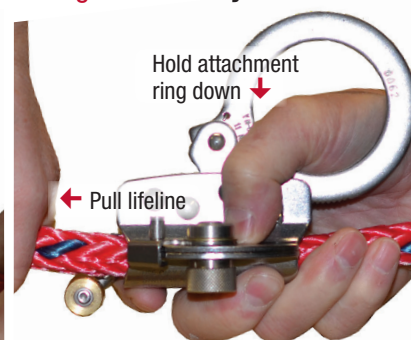

Easily moves = Pass
Does not move = Fail

Open/Close Gate Fig.16

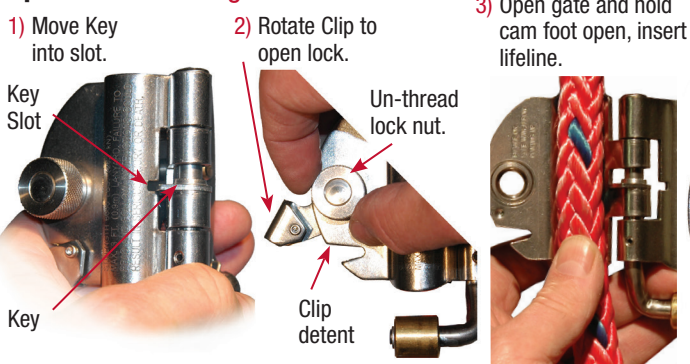

Function Tests

Test rope grabs and connectors before each use. Remove equipment from service if any function tests fails.


Fig.	Test Type	Function	Pass <input checked="" type="checkbox"/>	Fail <input type="checkbox"/>
13a-14a	Gate-lock	Push against gate only	Won't open	Opens
13b	Gate-open	Push gate-lock and gate at the same time	Opens	Gate won't open
13c	Gate-close	Release gate and gate-lock at same time	Snaps shut	Won't close and lock
14b-14-c	Un-lock gate	Rotate barrel lock	Gate opens	Won't open
14a	Gate closes	Release gate/barrel	Snaps shut	Won't close

Integral Adjuster 4015M Locking Test

Dual spring loaded cam-locks produce constant pressure on the lifeline that restricts movement. Mobility is achieved by pushing or pulling the adjuster up or down the lifeline. Push the cam-lock lever down to release pressure. See Fig.15b.

Cam-Lock Test

Fig.15a

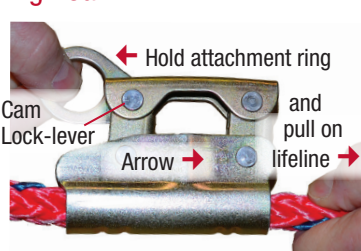

No movement = Pass
Any movement = Fail

Cam Mobility Test

Fig.15b




Lifeline moves easily =
Release Cam-Lock lever:
Pass Lever Snaps back closed.
Fail Lever does not close.

Super-Grab 4015: DO NOT REMOVE FROM LIFELINE!

A Prussic type device locks in two directions (bi-directional) by applying force to the connector end. Move position by pushing or pulling the wraps up or down on lifeline.

Fig.17

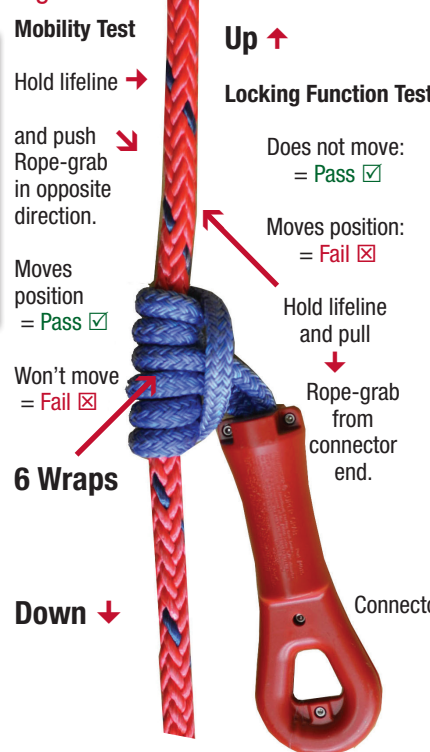

Mobility Test

Hold lifeline →
and push Rope-grab in opposite direction.
Moves position = Pass
Won't move = Fail

Locking Function Test

Does not move: = Pass
Moves position: = Fail
Hold lifeline and pull
Rope-grab from connector end.

WARNING!
Lifeline diameter grows with use and may restrict the mobility of 4015M-4015C. Function may be restored by cleaning or replacing the lifeline.

Lock gate

4) Close gate. Tighten Lock-nut
5) Rotate Clip-Lock into detent.

6 Wraps


Down ↓

4015 rated for use on vertical and horizontal lines. Mobility can be reduced by tightening the wraps.

Rigging/Length of Fall Plan

The Sample Length of Fall Plan (LOFP) shown here is based on the maximum stretch and deceleration values for each component, a user weight of 310lb (140kg), and a maximum free fall of 6ft (1.8m). To prevent contact with the ground or a lower level, the following factors must be calculated in your own Job Specific Length of Fall Plan:

- 1) Free fall length: "A"
- 2) Line slack: "C"
- 3) D-ring height: "B"
- 4) Rope grab deceleration: "D"
- 5) Absorber deployment: "E"
- 6) Harness stretch: "F"
- 7) Ground clearance: "G"

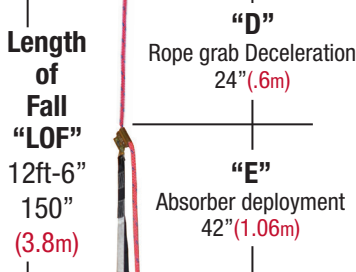

Calculate Line Slack "C"
Travel along the leading edge is limited to the amount of slack, "C" in the lifeline. The greater the slack, the wider the range of horizontal movement along the leading edge. Line slack is calculated by subtracting the D-ring height "B" from the free fall length "A".
Figs. 18a, 18b. (A-B) = C. The sample plan line slack value is 20" (.5m).

Adjusting Rope Grab Position
Shown at Fig. 18a, the PPE in this sample plan is rigged in tension to reduce excess slack. The vertical distance you will travel in a free fall is:
"B" Length from the lifeline D-ring connection to the leading edge. "C" The amount of slack in the lifeline.

Option: If the absorber and rope grab hang vertically from the D-ring at Fig. 18a, the length of the two components must be added to the "B" value D-ring height.

Calculate Length of Fall (A+D+E+F+G)=LOFP
Factors:

Factor	Sample Plan
1) Desired Free fall length "A"	72" (1.8m)
2) Rope grab deceleration "D"	24" (0.6m)
3) Absorber deployment "E"	42" (1.06m)
4) Harness stretch "F"	12" (0.3m)
Total Length of Fall (LOF)	150" (3.8m)
5) Ground clearance "G"	52" (1.3m)
Length of Fall Plan (LOFP)	202" (5.1m)

Note: Rope grab deceleration "D" may be eliminated from the LOFP by use of a Limiter Knot.

Insufficient Ground Clearance
WARNING! A failure to calculate the LOFP and correctly rig PPE can result in striking the ground or a lower level in the event of a fall and may lead to serious injury or death.

WARNING! PROMT RESCUE!
A plan for immediate rescue is necessary to avoid serious injury or death resulting from suspension trauma. SAS recommends that each harness is fitted with a suspension ladder and workers trained in its use. Request S.T.E.P Trauma Strap N°6060.

Labels

Lifeline eye thimbles are fitted with a primary label, an inspection matrix label and may have an optional rope grab label. Do not use equipment if the labels are missing or not readable.

Primary Label

Label A: w/snaphook CSA Logo. Label AA: no CSA Logo
Label A.1: w/carabiner CSA Logo. Label AA.1: no CSA Logo

Model | MODELE | Modelo
Part No | Numero de Parte | Número de Parte
Length | LONGUEUR | Largo
Max. Elongation Wet or Dry | ETIREMENT MAX. MOULLES/SECO | Elongación Máxima Mojada o Seca
Person Capacity | CAP. PERS. PERSONA | Capacidad

Year-Month of mfg.
Type of connector
Gate strength

Inspection Label

Label E: SAS Mfg - USA.

Year-Month of mfg.
Serial Number
REMOVE FROM SERVICE IF SUBJECTED TO A FALL
Warning: Avoid sharp edges and abrasive surfaces. Consult instruction manual and inspect before each use and inspect at least once a year.

Record Inspections

NOTE: 12 strand lifeline is mfg. only at SAS factory USA.

Rope Grab Label: Fall Arrestor 4015C

Model | MODELE | Modelo
ANSI Type I / CSA - ADP Fall Arrestor
Materials | MATERIAUX | Materiales
Strength | CAPACITE | Fuerza
Person Capacity | CAP. PERS. PERSONA | Capacidad

Rope Grab Label: Integral Adjuster 4015M

Model | MODELE | Modelo
ANSI Type I / CSA - Integral Adjuster
Materials | MATERIAUX | Materiales
Strength | CAPACITE | Fuerza
Person Capacity | CAP. PERS. PERSONA | Capacidad

Rope Grab Label: Super-Grab 4015

Model | MODELE | Modelo
ANSI Type I / III Rope Grab
Materials | MATERIAUX | Materiales
Strength | CAPACITE | Fuerza
Person Capacity | CAP. PERS. PERSONA | Capacidad