

# Commercial Roof Anchors • Vault Anchors

## CAL-OSHA Compliant Vault Anchor

An SAS exclusive, CAL-OSHA Vault anchors are 3rd party certified for zero permanent deformation with a 5,000lb load applied in any direction to the 2.0"i.d loop top. Flush mount on vertical wood or steel framed walls or concrete embedment. The Vault drain hole provides a means for installation over flat surfaces. USA mfg.

- Specified for Window Washing anchors PPE and Horizontal Lifeline Systems
- 316sst cast loop tops
- Drain Hole plugged w/1/2"d.sst hex head screw
- Bolt attach, concrete embedment or field weld
- Concealed bolt attachment for flush surface
- Hot dip galvanized, 304 or 316 stainless steel or thermoplastic waterproof coating.



Type "CA"  
Model 1605-G

### Type A/B Compliance:

CAL-OSHA Title 8, IWCA-14.1, OSHA 1910.140  
Engineering: 3rd party engineering by DH Glabe

Use Rating	Part Name	Attachment Specification	Material Type	SAS Part No.	Top Fixture		Approx wt/lb
					No.	Type	
Window Washing 1 Person PPE Anchor HLL End Anchors	Vault "CA"	Factory welded bolt nuts. Concrete Embedment or Field Welded	Yellow TP	1605-TP	1093-S	316sst	30
			HDG	1605-G			
			304sst	1605-S			
			316sst	1605-SX			
Vault "CB"	Attachment Bolts Embedment Bolts A-307 Threaded Rod	Yellow TP	1606-TP				
		HDG	1606-G				
		304sst	1606-S				
		316sst	1606-SX				

TP = Yellow Thermoplastic Coating. HDG=Hot Dip Galvanized

### Notes:

Type "A" anchors include 1/2"x 3.0" 18-2sst bolts and flat washers specified for concrete embedment.


Type "B" anchors require a backer plate and 1/2"d 18-2sst, grade 8 zinc plated bolts or A-307 threaded rod. For SAS supplied attachment bolts the customer must specify the length.

Max proof load 5,000lb.

### A/B/CA/CB Vault Backer Plates

Model	Part No.	Finish	Bolt Holes	Dimension	wt/lb
Vault-BP 1607-R		Raw	4ea 9/16"d	13-1/2x13-1/2x3/8"	19
Vault-BP 1607-TP		Yellow TP			
Vault-BP 1607-G		HDG			
Vault-BP 1607-S		304sst			
Vault-BP 1607-SX		316sst			

TP = Yellow Thermoplastic Coating. HDG=Hot Dip Galvanized

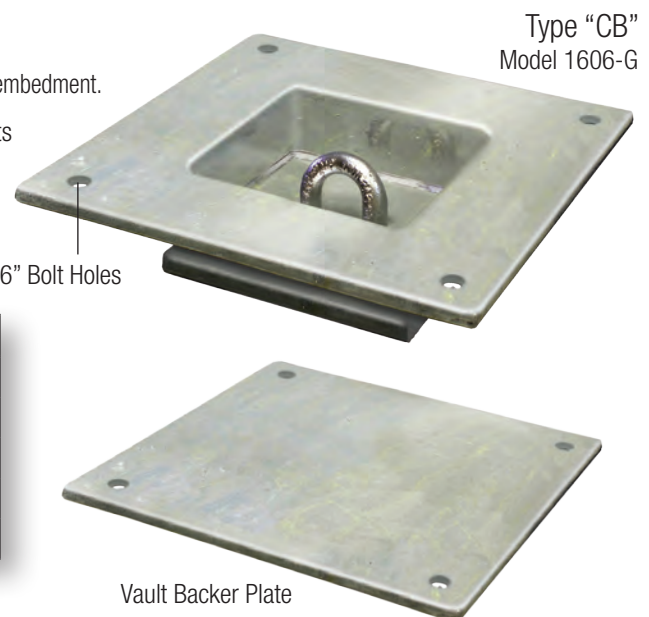

Type "CB"  
Model 1606-G