


Wood Purlin Anchor

Wood Purlin Anchor

No.1302-2XM heavy gauge Hot Dip Galvanized steel purlin anchor is designed for installation onto double 2x4 wood framing commonly used in pole buildings and structures with metal roofing panels. Use for permanent or temporary fall protection. All packages include instruction/specification manual, 25pc WS-1.5 wood screw pack and driver tip.

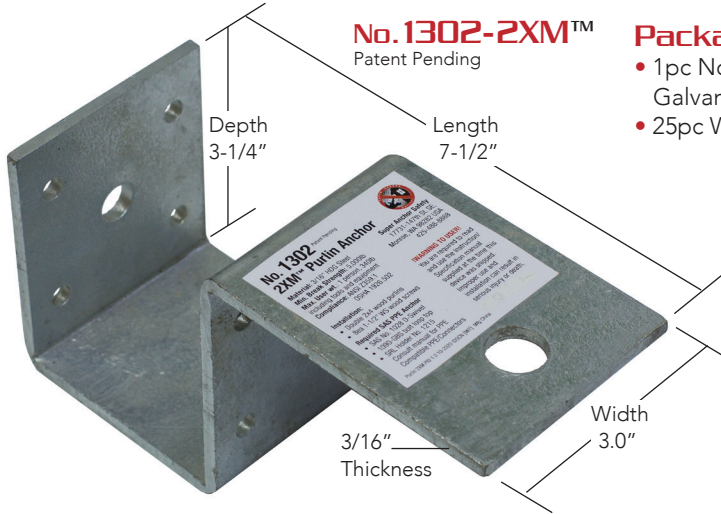

No. 1302-2XM™
Patent Pending

Package Contents

- 1pc No.1302-2XM Hot Dip Galvanized Purlin anchor
- 25pc WS-1.5 screw pack

User Specifications

- Single Person PPE anchor
- 5,000lb min. tensile strength
- Hot Dip Galvanized steel
- Installs w/8 WS-1.5 wood screws

WS-Wood Screw Pack

All Kits supplied with 25pc WS-1.5 screws + driver tip.



1-1/2"



3/8" Hex Driver



Compatibility

Swivel-D No.1028
No.1215 SRL-UH SRL Holder

Compliance

ANSI Z359.1/ OSHA 1926.502

No.1302-PS Kit™

Package Contents

- 1pc No.1302-2XM Purlin Anchor
- 1pc No.1028 Swivel-D anchor
- 25pc WS-1.5 screw pack
- 5/8"x2.0" sst bolt w/lock nut and sst washer

No.1302-PSK Kit

Designed for permanent installations over flat and ribbed metal panel roofing.

Package Contents

- 1pc No.1302-2XM Purlin Anchor
- 1pc No.1028 Swivel-D anchor
- 25pc WS-1.5 screw pack
- 5/8"x1-1/4" sst bolt w/lock nut
- 1pc No.1028-BP1 base plate
- 1pc 5/8"x 1.0" sst bolt w/lock nut
- 1pc 5/8" sst washer





Metal Roof Installation



Unique Design Feature

When installed at the ridge purlins the Swivel-D anchor is not covered by the roofing panels and may be removed if desired.

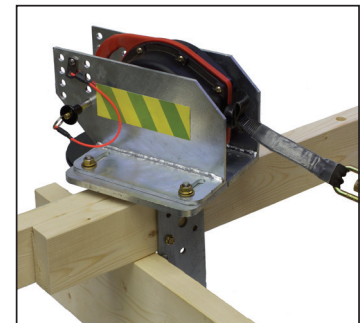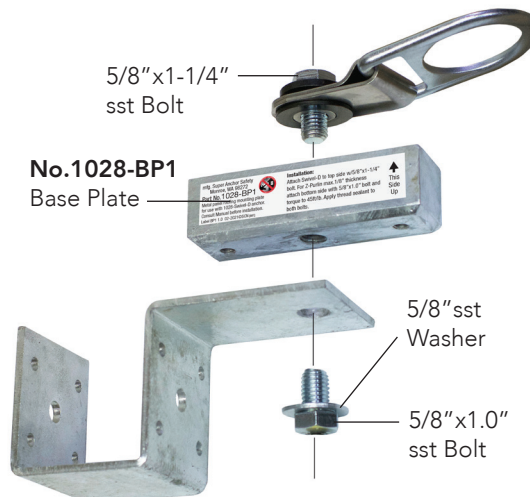

No.1220 SRL-UH Holder

Ideal solution for fall protection using SRL's. Bolt attach to purlin anchor for 360° SRL rotation.