

CSA Compliant Personal Energy Absorbers with Fall Arresters

For use in Canada, CSA requires vertical lifelines to be supplied with a synthetic rope fall arrester equipped with a panic grab function. The energy absorbing component must not exceed 30" in length and the fall arrester must be factory attached to the E/A. Shown here are CSA certified replacement Fall Arresters for use only on SAS mfg. Value-Z™ Lifelines No.4025-Z. Yoke mfg. fall arresters are of the highest quality and have proven to be the most reliable.



No.4025-ZSH Value-Z™ Lifeline

Features

- User wt. Range:** 135-310lb
- Compliance:** CSA Z259.2.5
- Lifeline:** Value-Z™ 5/8" 3 Strand
- Fall Arrester:** Zinc plated No.4015-Z w/Panic Grab Function. Yoke mfg.
- Max. Deceleration:** 39"

Advisory

Replacement Fall Arresters w/factory attached E/A's are required to be used only on SAS Value-Z™ Lifelines No.4015-Z when used in Canada.

- Aluminum Swage
- PID Labels
- Clear PVC *Shrink Tube

Replacement Fall Arresters w/Factory Attached E/A's

No.6180-ZZ
Energy Absorber

Vertical Lifeline E/A's are required by CSA to be factory attached to the fall arrester

No.6180-ZZ
Snaphook


No.6183-ZZ
No.5006-Z
Aluminum Anodized Auto-lock Carabiner

No.6183-ZZC
No.5000-ZY
Aluminum Auto-lock Captive Carabiner

No.6190-ZUL
Ultra-Lite™ Dee-Loop

No.4015-Z
Fall Arrester

Service Length
25ft
50ft
or
Custom Length

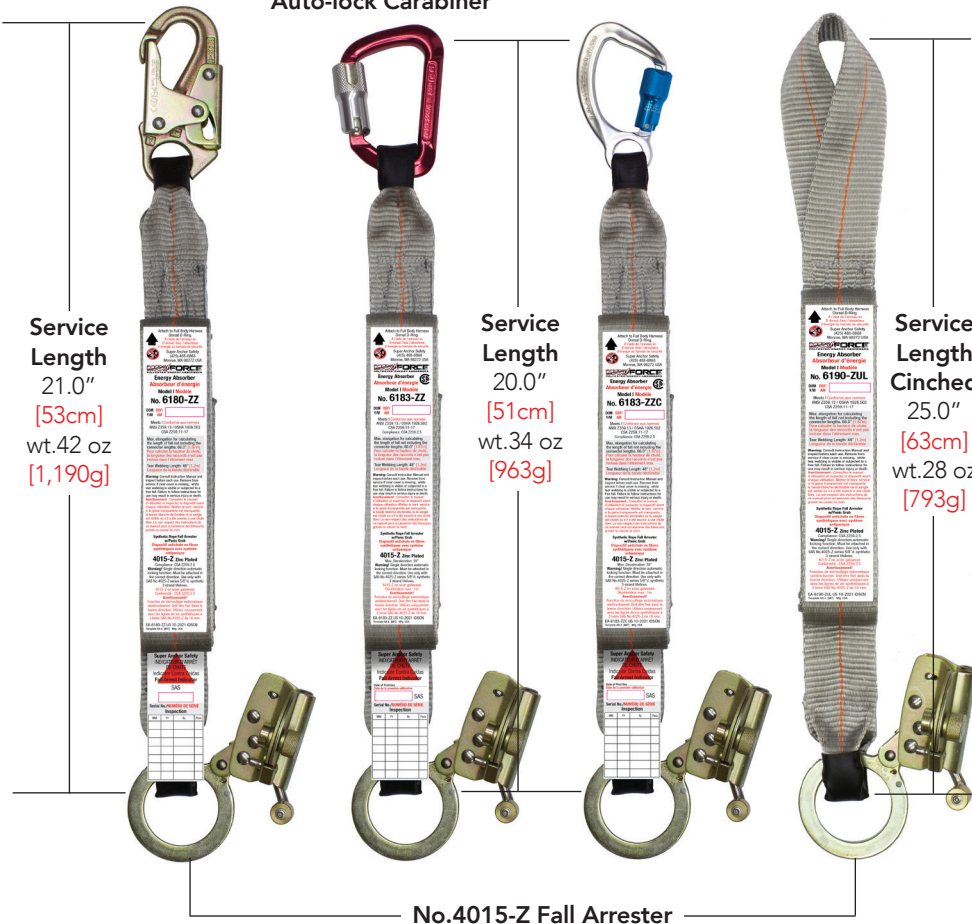

Aluminum Swage Stopper w/Clear PVC *Shrink Tube

*Shrink Tube Termination

No.4015-Z Fall Arrester

*Shrink tube has an interior adhesive to prevent movement and is replaceable.